



4 PORT MANAGED POE SWITCH

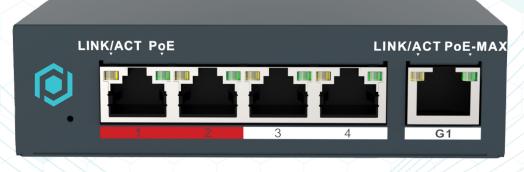

SWC5POE-MAN

Introducing the SWC5POE-MAN, our Managed PoE Switch with 1-4 ports and an extension mode spanning 250 meters, perfect for flexible network deployments. Visual management via VMS and topological diagrams on VMS Pro offer easy monitoring and optimization. With up to 10 cascade levels, P2P connection support, and red port priority, critical devices are ensured maximum performance. Real-time notifications keep you informed, while 100M uplink/downlink rates ensure fast and reliable data transfer. Streamline your network management and enhance performance with our Managed PoE Switch.

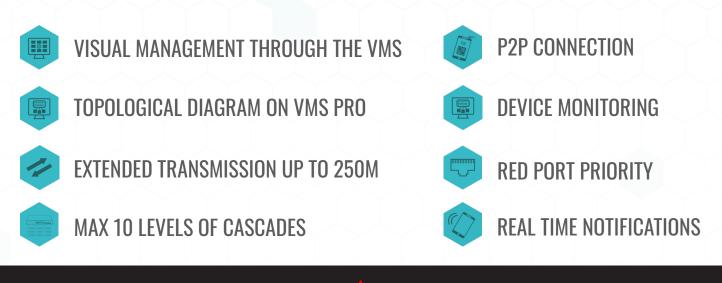


DESIGNED IN CANADA

GSD GROUP

MODEL	SWC5POE-MAN 1-PORT 10/100M Poe extender		
INTERFACES	RJ45 ,10/100,4x10/100M POE+1x10/100M	POE PORT	1~4
		EXTENSION MODE (EPOE)	250 Meters
NETWORK MANAGEMENT	Lite Manager (CMS connection ,POE power consumer statistics,	MAX. POWER (INDIVIDUAL PORT)	30W
	parameter configuration, log checking, firmware update, network topology)	MAX. POWER (ALL PORTS)	52W
		CASE	Metal
IEEE Standard	802.3\802.3x\802.3u\802.3az	WEIGHT	220g
UPLINK RATE (INDIVIDUAL PORT)	100M	DIMENSION (WXDXH)	110*82*30mm
DOWNLINK RATE (INDIVIDUAL PORT)	100M	OPERATING TEMPERATURE/HUMIDITY	Temperature : -10°C~+50°C; Humidity : Less than 90%RH
EXCHANGE CAPACITY	1Gbps		
PACKET FORWARDING RATE	0.7Mpps	STORAGE TEMPERATURE/HUMIDITY	Temperature : -40°C~+85°C; Humidity : Less than 90%RH
INTERNAL CACHE	1Mbits	POWER SUPPLY	48V/ 1.2A
POE STANDARD	IEEE 802.3at/af	LIGHTNING PROTECTION	4KV

DIMENSIONS

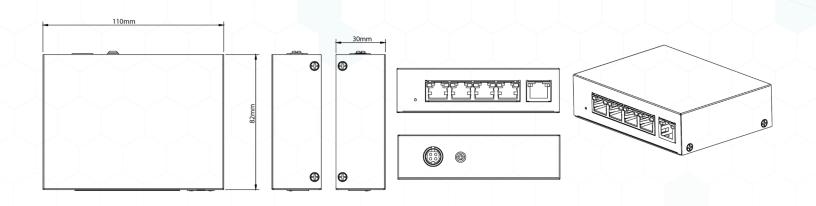

2024 Global Surveillance Distribution, G.S.D. Group and G.S.D are registered trademarks of Global Surveillance Distribution Group, Inc. in Canada and / or other countries. We reserve the right to change the design and specifications of the product Without notice and without incurring any obligation.

SALES@GSDGROUP.CA



NDAA 🗸