

30W

ACTIVE HORN SPEAKER



Experience the pinnacle of audio innovation with the SPK-30W-12V, our 12V DC powered speaker, setting new standards in sound technology. Boasting an extraordinary 108dB sound output and a wide frequency range from 400Hz to 8kHz, it guarantees an unparalleled audio journey. Powered by a 12V camera, it ignites to life in less than 1 second, ready to captivate with its built-in Class-D amplifier. Seamlessly communicate via mobile or VMS, while effortlessly integrating with IP cams featuring RCA input, expanding your audio horizons like never before. This speaker is a great companion for security and deterrence.

POWERED BY 12V CAMERA

BUILT-IN CLASS-D AMPLIFIER

STARTUP IN LESS THAN 1S

TALK THROUGH MOBILE OR VMS

108dB SOUND OUTPUT


WORKS WITH IP CAMS WITH RCA INPUT

CONNECTIONS

RATED POWER	30W
POWER SUPPLY	DC12V
SPL(1W/1M)	96dB
MAX. SPL@1M	108dB
FREQ. RESPONSE	400Hz-8KHz
DISPERSION ANGLE	230 degree
COVERAGE PATTERN ANGLE	60 degrees horizontal 90 degrees vertical at 2kHz
NETWORK PROTOCOL	SIP, ONVIF, HTTP, IPv4, DHCP, RTSP, RTP, RTCP, TCP, UDP, ARP, FTP, TFTP, NFS, NTP
AUDIO STREAMING	Full echo cancellation
AUDIO SUPPORT	OPUS 48 kHz, MP3 44.1 kHz, G.722 ADPCM 16 kHz, G.711 PCMU 8 kHz, G.711 PCMA 8 kHz
NETWORK SECURITY PROTOCOLS	HTTPS, TLS v1.2/v1.3, host-based firewall
APPROVALS	CE, FCC, Rohs
MATERIAL & FINISH	ABS
PRODUCT DIMENSION	285 x 205x 290 mm
INSTALLATION	Bracket mount
CONDITION TEMPERATURES	Operating: -30 ° — +60 °, Storage: -40 ° — +70 °



DIMENSIONS

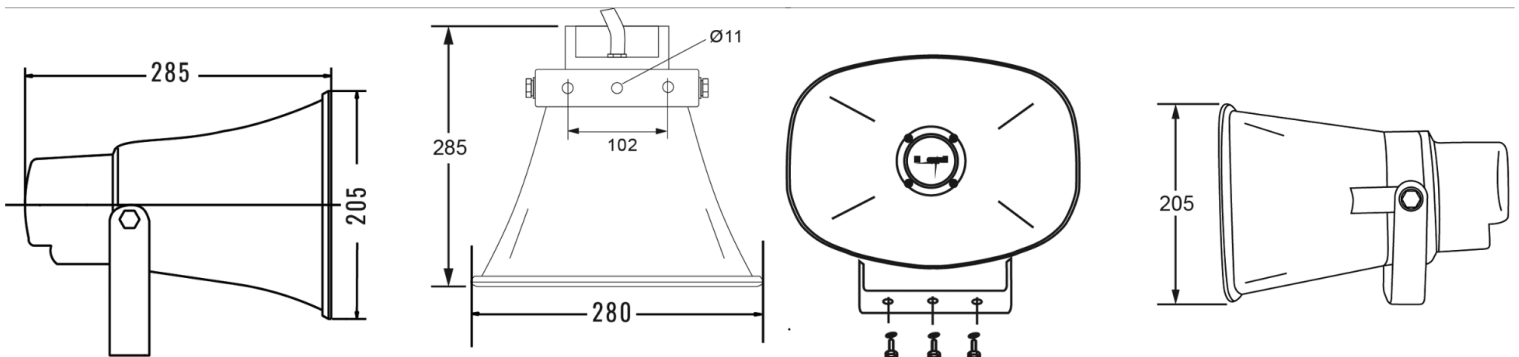

2024 Global Surveillance Distribution, G.S.D Group and G.S.D are registered trademarks of Global Surveillance Distribution Group, Inc. in Canada and / or other countries. We reserve the right to change the design and specifications of the product Without notice and without incurring any obligation.