

CTAVUE

SIMBIOS

LUXICAM

FENNEC SERIES

**G.S.D
GROUP**

SECURING YOUR WORLD

2025 SMART CATALOG

1ST QUARTER | REVISION 03.25

TABLE OF CONTENTS

Discover The G.S.D Advantage	3	PTZ Network Cameras	22
The Advantages of AI	4	Speciality Network Cameras	23
Octavue - Our New Cloud Account Management Platform	5	Network Video Recorders	24
Universal PoE Dual-Cam Bracket	6	HD Analog Cameras	26
PoE Accessories	7	Digital Video Recorders	28
Active Deterrence Solutions With X Series	8	HD Analog Accessories	29
PoE PVM Monitor	9	Servers	30
HDMI IP Camera	9	X Series Kits	31
Managed PoE Switch	10	Network Kits	32
Spectral Cameras	11	Analog Kits	33
Discover Our New 30W Speakers	12	Wireless Products	34
Luxicam	13	Network Accessories	36
Our Smart Guardian Mobile App	14	Mounting Accessories	37
Our Video Management Software Pro	15	PoE Switches	38
Eyeball Network Cameras	16	Speakers	39
Turret Network Cameras	17	Power Supplies	40
Dome Network Cameras	18	Public View Monitors	41
Bullet Network Cameras	19	Accessory Compatibility Chart	42
X Series Network Cameras	20	Model Chart	43

SECURING YOUR WORLD: **DISCOVER THE G.S.D ADVANTAGE**



Artificial Intelligence

We take pride in providing a diverse suite of cutting-edge AI detection solutions, encompassing over 14 distinct types, each meticulously developed to deliver a remarkable accuracy rate of 92%.



Team of Experts

We understand the integrator's journey. Our team of dedicated professionals have a strong security background, years of experience and are committed to providing tailored support, from selecting the ideal security solution to expert installation guidance.



Warranty

Our products come with up to 3 years of warranty assurance, demonstrating our confidence in the durability and performance of our solutions. In the rare event of issues, our team of experts is ready to deliver prompt assistance.



Logistics

Time is critical in the deployment of projects, and we prioritize delivery efficiency. Our dedicated team ensures stable stock availability and works closely with our distribution channel in order to optimize the availability of our products, ensuring your orders arrive promptly.



Project Assistance

Our experts are ready to collaborate with you, guiding you through the customization of floor plans and optimal device placement. Elevate your security measures with confidence, ensuring comprehensive coverage and maximum effectiveness.



Cutting-Edge Technology Solutions

We offer integrators access to cutting-edge solutions. Our commitment to innovation ensures that you can provide your customers with state-of-the-art video monitoring systems, staying ahead of industry trends and meeting the evolving needs of modern projects.

THE ADVANTAGES OF AI - UNLEASHING THE POSSIBILITIES



HUMAN DETECTION

Detects and follows human movement up to 100ft. Get notified as soon as a human is detected on your property.



QUEUE LENGTH DETECTION

Detect when large queues are formed and get notified after a specified amount of people are detected.



VEHICLE DETECTION

Detects and follows vehicle movement up to 200ft. Get notified as soon as a vehicle is detected on your property.



HEAT MAP FEATURE

Detect trends and patterns in movement.



FACE RECOGNITION

Identify faces with certain attributes. Get notified when a specified face is detected or track all the times an individual has been detected.



STATIONARY OBJECT DETECTION

Detects movement of an object in a selected frame.



LICENSE PLATE DETECTION

Identifies up to 200,000 licence plates of still and moving vehicles. Search a license plate to see its detection history.



CROWD DENSITY DETECTION

Identify peak hours and visitor traffic patterns with our people-counting feature.



PERIMETER INTRUSION DETECTION

Select a frame in your camera - any movement within that frame will be detected.



RARE SOUND DETECTION

Get notified when the camera microphone detects gunshots, a baby crying, or dogs barking.



LINE CROSSING DETECTION

Instantly detect any human or vehicle motion on a pre-defined virtual line.



REGION ENTRANCE AND EXITING

Detect when a target is entering or exiting a pre-defined area.



INTRUSION DETECTION

Instantly detect any intrusion past a pre-defined virtual zone.



VIDEO TAMPERING

Detect and prevent unauthorized alterations to your video footage, such as hiding content, or hitting the screen.



CROSS COUNTING

Count how many humans, vehicles or non-motorized vehicles came in and out of a selected frame.



NOISE DETECTION

Get alerted instantly when the crescendo's noise levels suddenly spike or drop

*It is the responsibility of the end user to comply with local regulations regarding personal privacy when using facial recognition technology.

OCTAVUE OUR NEW MULTI-SITE CLOUD ACCOUNT MANAGEMENT PLATFORM



Introducing our new Multi-Site Cloud Account Management Platform — coming soon. Designed to help you manage all your G.S.D devices effortlessly, all under one platform. No more hassle switching between multiple systems; streamline your device management with Octavue today!

OUR NEW OCTAVUE PLATFORM COMES PACKED WITH ADVANCED CLOUD BASED FEATURES TO IMPROVE YOUR DAY TO DAY OPERATIONS AND FACILITATE MANAGEMENT

HERE'S A SNEAK PEEK AT WHAT YOU CAN EXPECT:

DEVICE CONFIGURATION BACKUP

Safeguard your recorder and camera configurations with ease. Now you can backup your device settings under one superadmin account, making redeployment a breeze. If a camera's configuration is lost on-site, simply retrieve it from our servers.

LOGS BACKUP

Never lose device activity data again! Save all your device logs, including connection details, events, and more. This ensures that even in the event of recorder or camera failure, you'll have all the necessary information at your fingertips.

MULTI-USER ACCOUNT MANAGEMENT

Effortlessly manage access across multiple sites with four user tiers: Super-Admin, Admin, User, and Sub-User. This feature makes password management and limiting access between your team members easy and secure.

POS DATA MANAGEMENT

Store your POS data for extended periods so you can review past transactions and events as needed. This feature ensures you can access historical data whenever necessary, helping you maintain full control over your operations.

DEVICE HEALTH STATUS


Stay ahead of any potential issues with instant device health monitoring. Get notified in real time if a recorder or camera goes offline, ensuring you can take immediate action and reduce downtime to maximize service time for your customers.

COMING SOON

WEB-BASED CLOUD VMS

 **OCTAVUE.COM**

NEW WINDOWS & MAC PLATFORM

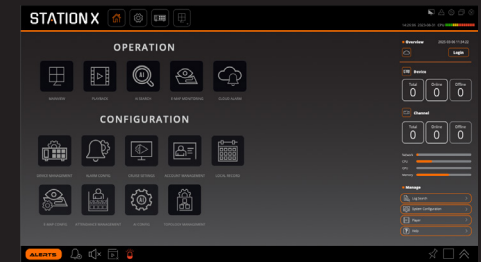

NEW APP ON IOS AND GOOGLE PLAY



**The OCTAVUE platform is a paid subscription based solution designed for professionals

UNIVERSAL POE DUAL-CAMERA BRACKET ON 1 WIRE

DBASEX COMPATIBLE CAMERAS



B7



D6



T2



XB7



XT3



T3

FEATURES

- Use 1 wire only for 2 cameras
- With built-in 2 poe ports
- No configuration needed
- Compatible with 3rd party cameras
- Wall mount installation
- Junction box installation
- Mounted on wall or ceiling
- Indoor & outdoor use

DBASEC COMPATIBLE CAMERAS



TEB



XEB




D2

PoE ACCESSORIES SIMPLIFY YOUR INSTALLATIONS

Extend your network reach without the need for additional power sources. Our PoE extenders provide a seamless solution for expanding your Ethernet network over long distances while simultaneously delivering both data and power to your devices.

COAX ACCESSORIES


#IP-COAX-300M

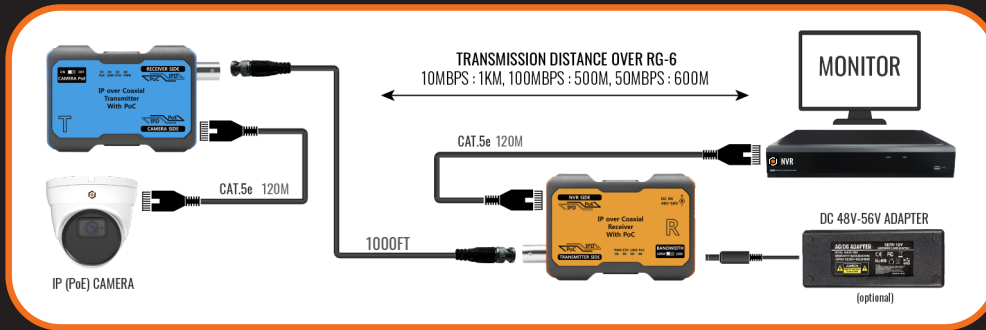

IP OVER COAX CONVERTER - CONVERTS SIGNAL FROM ANALOG TO IP WITH POE

NETWORK ACCESSORIES


#EXTPOE-GB-1K

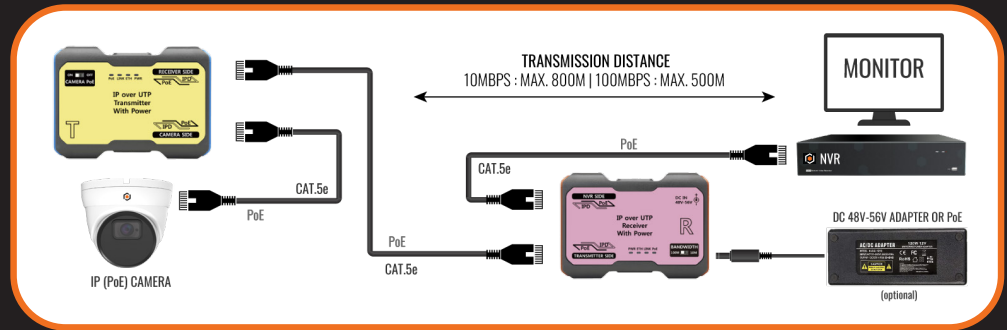

NETWORK DATA TRANSMITTER - TRANSMISSION SOLUTION VIA UTP CABLE


#IPCOAX4C-300M

Use the COAX Cabling as a 4-Port Poe Switch and connect it to your NVR

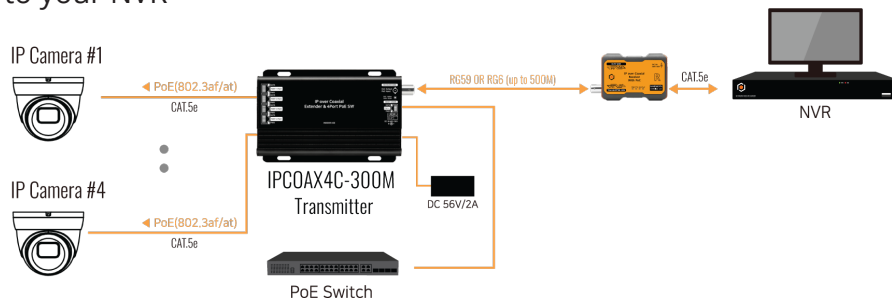

IP OVER COAX HYBRID DATA TRANSMITTER - CONNECT UP TO 4 CAMERAS AT 500M

#EXT-4POE++

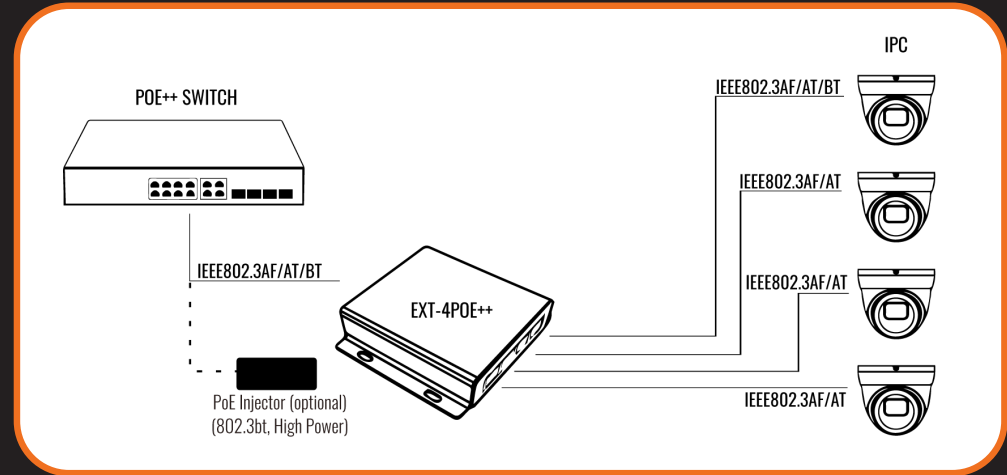

4 PORT POE++ EXTENDER AND SPLITTER - NO EXTERNAL POWER NEEDED!

ACTIVE DETERRENCE SOLUTIONS WITH X SERIES CAMERAS

30W HORN



DETERRENCE LIGHTS

Red and blue lights activated when AI detection is triggered



EDGE RECORDING

Use the on-board storage to record up to 1 month of AI detection with your 256GB SD card



P2P CLOUD CONNECTION

Scan your QR code & instantly connect without any port forwarding through a web port



INSTANT NOTIFICATIONS

Get notified for alarms such as AI detection, motion detection, I/O activation, or system failure



VOICE PROMPTS

Activate the siren or a pre-recorded message through AI detection or through our APP or VMS



#SPK-30W-12V

- 1 Power
- 2 RCA Output



TWO-WAY COMMUNICATION

With the SmartGuardian app, use the embedded or external microphone & speaker

5MP/8MP
RESOLUTION

5MP/8MP RESOLUTION

Experience ultra high definition with our 2k or 4k resolutions



SEE COLOR AT NIGHT

TotalView will bring you full color images up to 35m



AI FEATURES

Take advantage of our AI features to reduce false detections up to 92%



#XB7ZATV2812IP5MP-AI
#XB8ZTV2812IP8MP-AI



#XB7FPAN20IP8MP-AI

#XD6ZTV2812IP5MP-AI
#XD6ZTV2812IP8MP-AI

#XT2FPAN20IP8MP-AI

#XPTZ37XIP8MP-AI-N

#XEBATVIP5MP28-AI-L-64G (-B)
#XEBATVIP8MP28-AI-L-64G (-B)
#XEBFATVIP4MP28-AI-E (-B)

#XT3ZTV2812IP5MP-AI
#XT3ZTV2812IP8MP-AI

#XB7ZATV2812IP5MP-AI
#XB8ZTV2812IP8MP-AI

EVERYTHING ON 1 WIRE

ENJOY TWO-WAY COMMUNICATION
WITH OUR APP
SMART GUARDIAN

POE PVM MONITOR

OUR INNOVATIVE PVM MONITORS BOAST A RANGE OF FEATURES TAILORED FOR RETAIL SETTINGS

IK7 TEMPERED GLASS

CUSTOMIZABLE DISPLAY


WIFI & RJ45 CONNECTION

DC 12V OR POE POWERED

CUSTOM ADVERTISEMENT DEPLOY VIA A MANAGEMENT SOFTWARE

RECORD DIRECTLY ON LOCAL NVR OR OPTIONAL 1TB SD CARD

BUILT TO RUN 24/7 OR WITH CUSTOMIZED WORK SCHEDULE

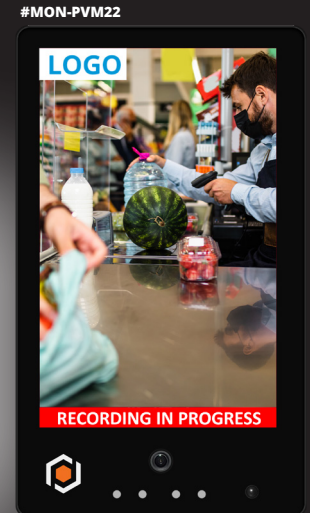

HDMI IP CAMERA

#D3F28IP2MP-HDMI



2MP RESOLUTION

DC12V OR POE

2.8MM LENS

CUSTOM DETERRANCE MESSAGE



CONNECTS TO ANY TV DIRECTLY WITH THE HDMI CABLE!



MANAGED **POE SWITCH**

MANAGE YOUR DEVICES DIRECTLY FROM OUR VMS SOFTWARE



TOPOLOGICAL DIAGRAM ON VMS PRO

View where your camera is located on the diagram (which port on which switch). Save time by quickly locating the issue on your network.



DEVICE MONITORING

Live monitoring on the status of your devices, local and global power usage per port, instant & alarm notifications when a camera is down.



VISUAL MANAGEMENT THROUGH THE VMS

Manage your devices directly through your switch using our Video Management Software, restart the camera directly from your PoE switch.



MAX 10 LEVELS OF CASCADES

View up to 10 cascades of devices as a diagram.



EXTENDED TRANSMISSION UP TO 250M

Extended power transmission up to 250m with extension mode.




REAL TIME NOTIFICATIONS

Receive instant notification alerts on the app.



RED PORT PRIORITY

High priority ports that prioritize device data transmission.

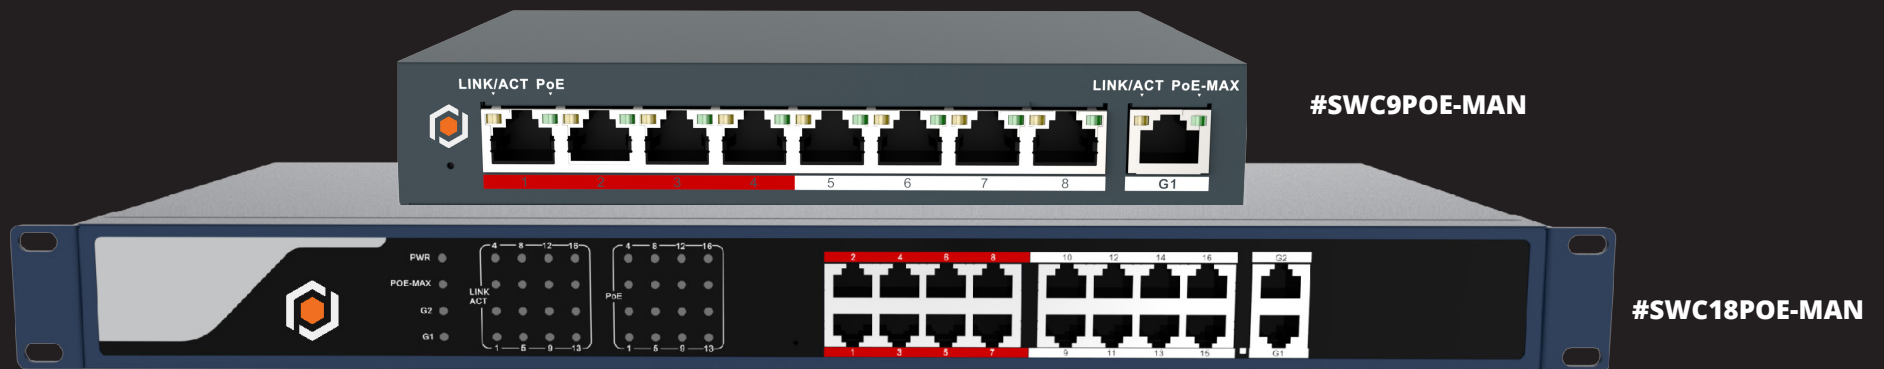

SPECTRAL SERIES CAMERAS

SEE FULL COLOR IN COMPLETE DARKNESS

Unlike typical night vision cameras that use infrared LEDs to illuminate the scene (which often results in grainy or monochromatic images), our spectral cameras use advanced 5th-generation starlight technology. This provides a warm light that enhances natural color details without the harsh, bright light seen in our Total View cameras. This allows for clear, high-quality images without the ghosting effect often found in lower-quality models.



**SPECTRAL
LIGHT**



**NO MORE
GHOSTING**



**DETRRENCE
LIGHTS**



**AI
DETECTION**




**TWO-WAY
COMMUNICATION**



**REAL TIME
NOTIFICATIONS**

Full color in complete darkness and no ghosting effects.

Ability to maintain high contrast and sharpness in both light and dark areas of the image.

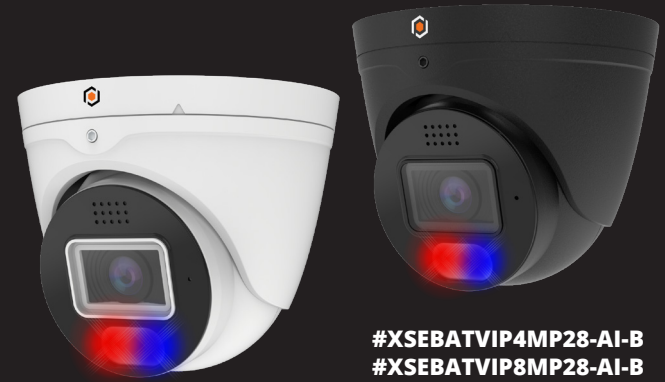

**#XSEBATVIP4MP28-AI-B
#XSEBATVIP8MP28-AI-B**

**#XSEBATVIP4MP28-AI
#XSEBATVIP8MP28-AI**



#XLPRB9Z832IP8MP-AI



Spectral Mode At Night

Our advanced spectral imaging and low-light sensor technology allows you to capture detailed full-color images even in total darkness. The camera utilizes wide-spectrum sensors that can detect a broad range of light wavelengths, including infrared (IR) and visible light, without relying on traditional IR illumination.



Spectral Camera in Daylight

While in daylight, most cameras use conventional RGB sensors to capture color images, our spectral camera ensures that it remains highly sensitive across the full visible spectrum and does not saturate or overexpose highlights. The transition from Spectral Mode (low light) to Daylight Mode (normal conditions) is seamless.



TotalView Camera At Night

Total View cameras combine advanced imaging technology with a powerful low-light sensor to capture clear, full-color images in total darkness. Equipped with a large F1.0 super aperture and dual LED illumination (white light), these cameras provide exceptional visibility across a wide range of lighting conditions.



Regular Camera with IR LEDs

A regular camera uses infrared LEDs to illuminate the scene when light is low or absent. These LEDs emit infrared light, which is invisible to the human eye but can be detected by the camera's infrared-sensitive sensor. This allows the camera to capture monochrome images at night, though the range is often limited by the power of the infrared LEDs.

DISCOVER OUR **30W SPEAKERS**

OUR SPEAKERS CAN BE POWERED BY YOUR CAMERA, ENSURING EFFICIENT AND HASSLE-FREE INSTALLATION

30W ACTIVE HORN SPEAKER

#SPK-30W-12V



- Powered by camera 12V
- Startup in less than 1s
- Built-in Class-D amplifier
- Talk through mobile or VMS
- Works with IP cameras with RCA input
- IP67 waterproof design
- Can be used in daisy chain with SIP Onvif speaker

30W ONVIF SIP NETWORK HORN SPEAKER

#SPK-IP30W-POE



- 1 Power
- 2 RCA Output

- Built-in microphone
- Startup in less than 1s
- Supports MP3, WMA & WAV
- Supports PoE.at
- IP66 water resistant design
- Compatible with Onvif and SIP multicast support up to 10 IPs

INNOVATIVE WIFI SOLUTION WITH EDGE RECORDING WHICH INCLUDES DOORBELLS BULLET AND PAN-TILT CAMERAS, DESIGNED TO SIMPLIFY A HOMEOWNER'S DAY TO DAY CHALLENGES



#DB5MP-B-64G

#PTWLIP4MP-AI-64G

#B2FWLIP4MP-AI-64G

Manage your devices directly from our app: O.V. Connect



SCARE INTRUDERS AWAY

ACTIVATE DETERRENCE LIGHTS DIRECTLY FROM YOUR PHONE



TALK & LISTEN

COMMUNICATE BOTH WAYS WITH THE BUILT-IN MICROPHONE & SPEAKER

SEE IN COLOR AT NIGHT

SEE IN FULL COLOR AT NIGHT WITH THE INTEGRATED SPOTLIGHT



SIMPLE INSTALLATION

WiFi CONNECTION - NO NEED TO PASS CABLES THROUGH YOUR HOME

DETECTION ALERTS

DETECT HUMANS OR PACKAGES & GET REAL-TIME NOTIFICATIONS




EASY APP SETUP

EASILY CONNECT TO YOUR CAMERA BY SCANNING THE QR CODE

2K

HD VIDEO QUALITY

CAPTURE CRYSTAL-CLEAR FOOTAGE WITH HIGH-DEFINITION VIDEO RESOLUTION




EDGE RECORDING (64GB INCLUDED)

NO RECORDER NEEDED - 64GB SD CARD STORES FOOTAGE DIRECTLY ON YOUR CAMERA




BATTERY POWERED DOORBELL

ENJOY WIRELESS CONVENIENCE WITH LONG-LASTING BATTERY POWER

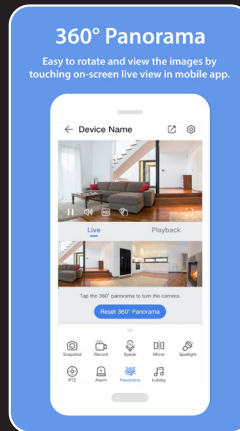


360° Panorama

Easy to rotate and view the images by touching on-screen live view in mobile app.

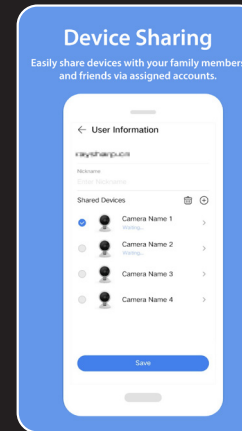


Device Sharing

Easily share devices with your family members and friends via assigned accounts.

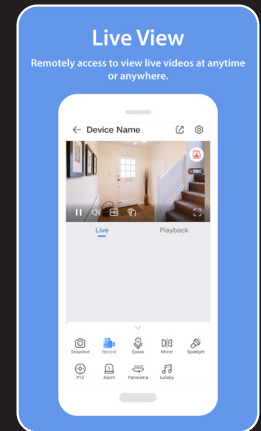


Live View

Remotely access to view live videos at anytime or anywhere.

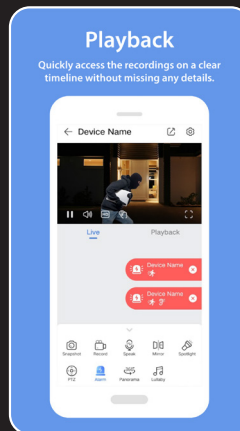


Playback

Quickly access the recordings on a clear timeline without missing any details.

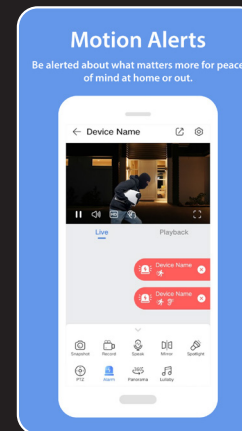

Motion Alerts

Be alerted about what matters more for peace of mind at home or out.

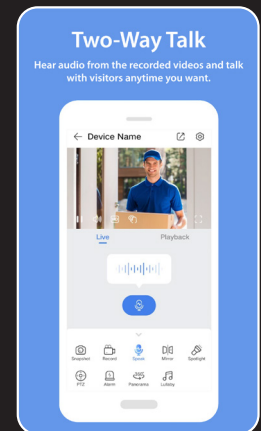

Two-Way Talk

Hear audio from the recorded videos and talk with visitors anytime you want.

OUR SMART GUARDIAN MOBILE APP

OUR INTUITIVE APP ALLOWS YOU TO EASILY CONNECT AND MANAGE YOUR SECURITY CAMERAS. VIEW LIVE FOOTAGE AND RECEIVE INSTANT NOTIFICATIONS ON YOUR SMARTPHONE OR TABLET

SCAN AND CONNECT!

EACH OF OUR DEVICES INCLUDES A QR CODE THAT YOU CAN SCAN AND INSTANTLY ACCESS YOUR DEVICES



LIVE VIEW

VIEW UP TO 16 CHANNELS SIMULTANEOUSLY

FAVOURITES

SET DIFFERENT CHANNELS FROM DIFFERENT SITES AS YOUR FAVOURITES

SEARCH

SELECT UP TO 4 CAMERAS FOR INSTANT SEARCH


AI SEARCH

SEARCH WITH AI DETECTION WITH A SPECIFIED TIME FRAME

PUSH NOTIFICATIONS

RECEIVE CUSTOMIZABLE ALERTS

ALARM/HUMAN & VEHICLE DETECTION /MOVEMENT/FACE RECOGNITION/HARD DISK ERROR/VIDEO LOSS

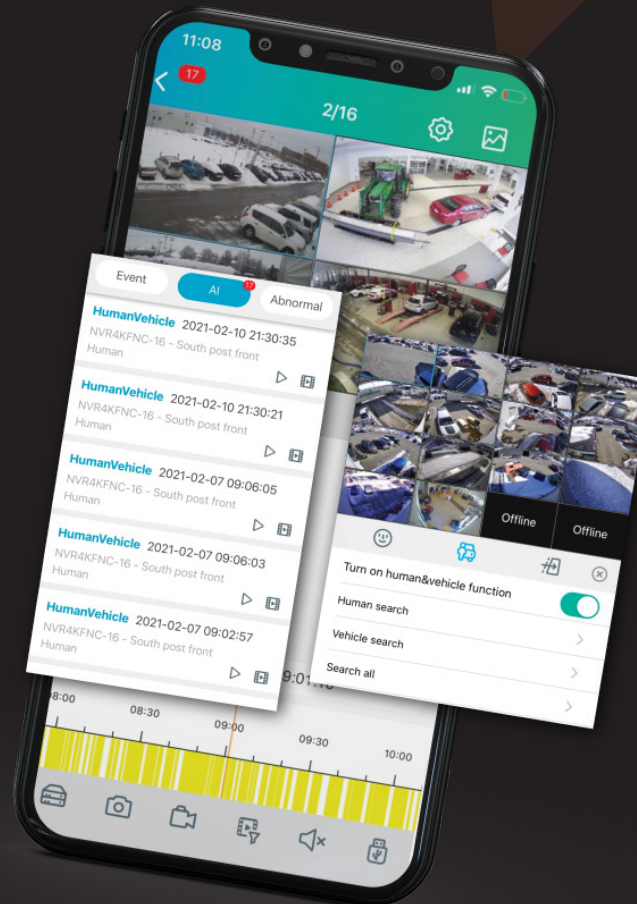

2 WAY AUDIO

LISTEN OR SPEAK THROUGH THE APP

ALARM

TRIGGER YOUR ALARM RELAYS, DETERRENCE LIGHTS, AND SIRENS

RECORD

RECORD ON MOBILE DEVICE SNAPSHOT OR VIDEO FILES

SAVE & SHARE

EASILY SAVE & SHARE VIDEO FILES THROUGH EMAIL, CLOUD, OR SMS


REMOTE CONFIGURATION

SETUP YOUR DEVICE REMOTELY

Station5 OUR VIDEO MANAGEMENT SOFTWARE PRO


MAIN FEATURES

- Multiple live view windows (up to 400 cameras)
- Set up and manage up to 250 devices
- Fast playback with AI features
- Limit access through multiple user accounts
- P2P connection with an easy serial code
- Easy backup in avi or mpeg4 format
- Auto-login features with saved layout
- Search by statistics



EASY REMOTE PLAYBACK

- Search by time or date to quickly locate footage
- Choose between synchronous or single-camera playback
- Zoom in on any camera during playback for detailed viewing
- Adjust main or sub-bandwidth settings
- Save footage in AVI, RF, or MPEG4 formats
- Smart search by Region of Interest (ROI)




LIVE VIEW

- View up to 128 channels per window
- Easily create and access favorites from different sites
- Automatically display cameras when VMS starts
- Choose from 24 different division view types
- Listen and speak through the system with two-way communication
- Receive real-time notifications for human, vehicle, or trigger-based events



E-MAPPING

- Easily locate your cameras & monitor your store
- Upload your floor plan & assign optimized camera placement
- Get alarm notifications through the floor plan

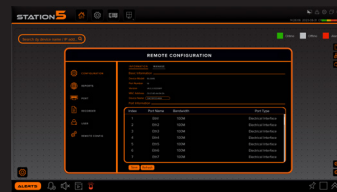

REMOTE CONFIGURATION

- Access each device setup remotely with full access
- Enable quick and easy updates to devices or software
- Manage a large number of devices or software instances



SCENE REPORTS

- Use advanced AI to track and control the number of customers, visitors, and vehicles in public spaces in real time
- Monitor attendance for faces, humans, motor vehicles, and non-motorized vehicles in real time
- Configure your settings to receive daily, weekly, monthly, or yearly attendance reports via email
- View real-time attendance data by group




SEARCH WITH A.I.

- Search by human or vehicle detection, or facial recognition for quick identification
- Perform AI searches across all channels simultaneously
- Narrow down searches within a specific time range
- Save images in AVI, RF, or MPEG4 formats
- Utilize advanced AI search for smarter event searches
- Search by vehicle license plate for precise results



STATISTICS VIEWER

- View statistics for: facial detection, human and vehicle detection, cross counting, heat map, repeated visitor
- Filter statistics by day, week, month, quarter, year
- Export as excel file

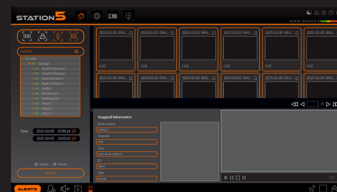

RECURRING VISITOR TRACKER

- Search by facial recognition
- AI search across all channels simultaneously
- Set a specific time frame for searches
- Backup images in AVI, RF, or MPEG4 format

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

	TEBFDAIP12MP36-AI ^N NEW  MICROPHONE MICRO SD CARD UP TO 256GB	TEBFDATVIP5MP28-AI ^N TEBFDATVIP5MP28-AI-B  MICROPHONE SEE IN COLOR AT NIGHT MICRO SD CARD UP TO 256GB	TEBFDAIP5MP28-AI-L ^N TEBFDAIP5MP28-AI-L-B  MICROPHONE MICRO SD CARD UP TO 256GB	TEBFDAIP8MP28-AI-L ^N TEBFDAIP8MP28-AI-L-B  MICROPHONE MICRO SD CARD UP TO 256GB	TEBFDAIP8MP28-AI ^N TEBFDAIP8MP28-AI-B  MICROPHONE MICRO SD CARD UP TO 256GB
Resolution	12MP	5MP	5MP	8MP	8MP
Lens	3.6MM	2.8MM	2.8MM	2.8MM	2.8MM
Lens Type	Fixed	Fixed	Fixed	Fixed	Fixed
IR	30M	30M Warmlight 25M	30M	30M	30M
Lux	0.01	0.002	0.004	0.009	0.009
WDR	Digital	90dB	90dB	Digital	90dB
Night Vision	No	TotalView	No	No	No
Microphone	Yes	Yes	Yes	Yes	Yes
Speaker	No	No	No	No	No
Audio In/Out	No	No	No	No	No
Alarm In/Out	No	No	No	No	No
Micro SD Card	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB
PoE	Max. 5.5W	Max. 5.2W	Max. 5.5W	Max. 5.5W	Max. 6.5W
Codec	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265
Color	White	White or Black	White or Black	White or Black	White or Black
Temperature	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C
IP & IK rating	IP67	IP67	IP67	IP67	IP67
Junction Box	TEBBASE1	TEBBASE1	TEBBASE1	TEBBASE1	TEBBASE1
Wall Mount	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G
Ceiling Mount	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G
Compliance	   	   	   	   	   
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

T2IP5MP28-L-N



- TRUE WDR
- AUDIO IN/OUT

T2IP8MP28-L-N



- AUDIO IN/OUT

T3Z2812IP5MP-AI-L
T3Z2812IP5MP-AI-L-B



- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

T3Z2812IP8MP-AI



- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

Resolution	5MP	8MP	5MP	8MP
Lens	2.8MM	2.8MM	2.8-12MM	2.7-13.5MM
Lens Type	Fixed	Fixed	Motorized	Motorized
IR	30M	20M	45M	45M
Lux	0.004	0.009	0.004	0.009
WDR	120dB	Digital	90dB	90dB
Audio In/Out	Yes	Yes	Yes	Yes
Alarm In/Out	No	No	Yes	Yes
Mirco SD Card	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB
PoE	Max. 5.5W	Max. 5W	Max. 9W	Max. 10W
Codec	H264 H265	H264 H265	H264 H265	H264 H265
Color	White	White	White or Black	White
Temperature	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C
IP & IK rating	IP67	IP66	IP67	IP67
Junction Box	EB3BASE4	EB3BASE4	EB3BASE3	EB3BASE3
Wall Mount	WMB5 OR WMB6 + EB3BASE4-G	WMB5 OR WMB6 + EB3BASE4-G	WMB5 OR WMB6 + EB3BASE3-G	WMB5 OR WMB6 + EB3BASE3-G
Ceiling Mount	CMB6-G + EB3BASE4-G	CMB6-G + EB3BASE4-G	CMB6-G + EB3BASE3-G	CMB6-G + EB3BASE3-G
Compliance	ONVIF	ONVIF	ONVIF	ONVIF
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

D2FDA28IP5MP-AI 

Special Order



- IMPACT RESISTANT
- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

D2FDA28IP5MP-AI-L
D2FDA28IP5MP-AI-L-B 



- MICROPHONE
- IMPACT RESISTANT
- MICRO SD CARD UP TO 256GB

D2FDA36IP12MP-AI 

NEW



- MICROPHONE
- MICRO SD CARD UP TO 256GB

D2Z288IP5MP-AI 

Special Order



- MICROPHONE
- IMPACT RESISTANT
- MICRO SD CARD UP TO 256GB

D6Z2812IP5MP-AI-L 

- TRUE WDR
- IMPACT RESISTANT
- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB



D6Z2812IP5MP-AI-B 

- IMPACT RESISTANT
- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB



D6Z2812IP8MP-AI 

- IMPACT RESISTANT
- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB



































D3F28IP2MP-HDMI 

Special Order



- TRUE WDR
- HDMI OUTPUT
- AUDIO IN/OUT
- MICRO SD CARD SLOT UP TO 1TB

Resolution	5MP	5MP	12MP	5MP	5MP	5MP	8MP	2MP
Lens	2.8MM	2.8MM	3.6MM	2.8-8MM	2.8-12MM	2.7-13.5MM	2.7-13.5MM	2.8MM
Lens Type	Fixed	Fixed	Fixed	Motorized	Motorized	Motorized	Motorized	Fixed
IR	30M	30M	30M	30M	30M	30M	30M	20M
Lux	0.05	0.004	0.01	0.004	0.004	0.05	0.1	0
WDR	90dB	90dB	Digital	90dB	120dB	90dB	120dB	120dB
Microphone	No	Yes	Yes	Yes	No	No	No	No
Speaker	No	No	No	No	No	No	No	No
Audio In/Out	Yes	No	No	No	Yes	Yes	Yes	Yes
Alarm In/Out	Yes	No	No	No	Yes	Yes	Yes	No
Mirco SD Card	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB
PoE	Max. 5.5W	Max. 5W	Max. 5.5W	Max. 5W	Max. 7W	Max. 7.5W	Max. 7W	Max. 6.84W
Codec	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265
Color	White	White or Black	White	White	White	Black	White	White
Temperature	-30~+55°C	-30~+55°C	-35~+60°C	-30~+55°C	-35~+55°C	-30~+55°C	-30~+55°C	-30~+40°C
IP & IK rating	IP67 IK10	IP67 IK10	IP67	IP67 IK10	IP67 IK10	IP67 IK10	IP67 IK10	IP67
Junction Box	D2BASE1	D2BASE1	D2BASE1	D2BASE1	EB3BASE3	EB3BASE3-B	EB3BASE3	D2BASE1
Wall Mount	WMB2 OR WMB6 + D2BASE1-G	WMB2 OR WMB6 + D2BASE1-G	WMB2 OR WMB6 + D2BASE1-G	WMB2 OR WMB6 + D2BASE1-G	WMB5 OR WMB6 + EB3BASE3-G	WMB5-B	WMB5 OR WMB6 + EB3BASE3-G	WMB2 OR WMB6 + D2BASE1-G
Ceiling Mount	CMB6-G + D2BASE1-G	CMB6-G + D2BASE1-G	CMB6-G + D2BASE1-G	CMB6-G + D2BASE1-G	CMB6-G + EB3BASE3-G	N/A	CMB6-G + EB3BASE3-G	CMB6-G + D2BASE1-G
Compliance	   	   	   	   	   	   	   	   
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series



PTZ

Speciality IP

NVRS



B7Z2812IP5MP-AI-N 



-  ALARM/AUDIO IN/OUT
-  MICRO SD CARD UP TO 256GB




B7Z2812IP8MP-AI 















-  ALARM/AUDIO IN/OUT
-  MICRO SD CARD UP TO 256GB

B7Z550IP8MP-AI 



-  TRUE WDR
-  ALARM/AUDIO IN/OUT
-  MICRO SD CARD UP TO 256GB

Resolution	5MP	8MP	8MP
Lens	2.7-13.5MM	2.7-13.5MM	5-50MM
Lens Type	Motorized	Motorized	Motorized
IR	45M	45M	80M
Lux	0.05	0.1	0.009
WDR	90dB	90dB	120dB
Microphone	No	No	No
Speaker	No	No	No
Alarm In/Out	Yes	Yes	Yes
Alarm In/Out	Yes	Yes	Yes
Mirco SD Card	Up to 256GB	Up to 256GB	Up to 256GB
Codec	H264 H265	H264 H265	H264 H265
Color	White	White	White
Temperature	-35~+60°C	-35~+60°C	-35~+60°C
IP & IK rating	IP66	IP66	IP67
Junction Box	B6BASE1	B6BASE1	B6BASE1
Wall Mount	Included	Included	Included
Ceiling Mount	N/A	N/A	N/A
Compliance	   	   	   
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

XEBFATVIP4MP28-AI-E
XEBFATVIP4MP28-AI-E-B
LIMITED



- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- 64GB MICRO SD CARD INCLUDED

XEBATVIP5MP28-AI-L-64G
XEBATVIP5MP28-AI-L-B-64G



- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- 64GB MICRO SD CARD INCLUDED

XEBATVIP8MP28-AI-L-64G
XEBATVIP8MP28-AI-L-B-64G



- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- 64GB MICRO SD CARD INCLUDED

XEBATVIP8MP28-AI-64G
XEBATVIP8MP28-AI-B-64G



- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- 64GB MICRO SD CARD INCLUDED

XT2FPAN20IP8MP-AI
NEW



- TRUE WDR
- 180° PANORAMIC VIEW
- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- MICRO SD CARD UP TO 256GB

XB7FPAN20IP8MP-AI



- ALARM/AUDIO IN/OUT
- 180° PANORAMIC VIEW
- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- MICRO SD CARD UP TO 256GB

NEW **XSEBATVIP4MP28-AI**
XSEBATVIP4MP28-AI-B
Special Order



- SEE IN FULL COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- MICRO SD CARD UP TO 256GB

NEW **XSEBATVIP8MP28-AI**
XSEBATVIP8MP28-AI-B



- SEE IN FULL COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- MICRO SD CARD UP TO 256GB

Resolution	4MP	5MP	8MP	8MP	8MP	8MP	4MP	8MP
Lens	2.8MM	2.8MM	2.8MM	2.8MM	2.0MM	2.0MM	2.8MM	2.8MM
Lens Type	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
IR	25M	25M	25M	25M	25M	25M	20M	20M
Lux	0.002	0.002	0.007	0.007	0.007	0.007	0.0005	0.0007
WDR	Digital	90dB	Digital	90dB	120dB	90dB	90dB	90dB
Microphone	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Speaker	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Audio In/Out	No	No	No	No	No	No	No	No
Alarm In/Out	No	No	No	No	No	No	No	No
Deterrence	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights
Siren	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Night Vision	TotalView	TotalView	TotalView	TotalView	TotalView	TotalView	Spectral	Spectral
Mirco SD Card	Up to 256GB	64GB Included	64GB Included	64GB Included	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB
PoE	Max. 7.5W	Max. 7W	Max. 7W	Max. 6.6W	Max. 13.1W	Max. 12W	Max. 5.44W	Max. 6.96W
Codec	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265
Color	White or Black	White or Black	White or Black	White or Black	White	White	White or Black	White or Black
Temperature	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C
IP & IK rating	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Junction Box	TEBBASE1	TEBBASE1	TEBBASE1	TEBBASE1	EB3BASE6	TEBBASE1	TEBBASE1	TEBBASE1
Wall Mount	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB5 OR WMB6 + EB3BASE6-G	TEBBASE1-G OR CMB6-EXT-120	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G
Ceiling Mount	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + EB3BASE6-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G
Compliance								
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

XB7ZATV2812IP5MP-AI



- ⊗ ALARM/AUDIO IN/OUT
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

XB8ZTV2812IP8MP-AI



- ⊗ ALARM/AUDIO IN/OUT
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

XD6ZTV2812IP5MP-AI



- ⊗ IMPACT RESISTANT
- ⊗ ALARM/AUDIO IN/OUT
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

XD6ZTV2812IP8MP-AI



- ⊗ IMPACT RESISTANT
- ⊗ ALARM/AUDIO IN/OUT
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

XT3ZTV2812IP5MP-AI
XT3ZTV2812IP5MP-AI-B



- ⊗ ALARM/AUDIO IN/OUT
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

XT3ZTV2812IP8MP-AI
XT3ZTV2812IP8MP-AI-B



- ⊗ ALARM/AUDIO IN/OUT
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

XPTZ4XIP8MP-AI



- ⊗ 350° LONG RANGE
- ⊗ 4X OPTICAL ZOOM
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

XPTZ37XIP8MP-AI-N



- ⊗ TRUE WDR
- ⊗ AUTO-TRACKING
- ⊗ 360° LONG RANGE
- ⊗ ALARM/AUDIO IN/OUT
- ⊗ SEE IN COLOR AT NIGHT
- ⊗ 37X OPTICAL / 16X DIGITAL ZOOM
- ⊗ TWO-WAY COMMUNICATION
- ⊗ DETERRENCE LIGHTS & SIREN
- ⊗ MICRO SD CARD UP TO 256GB

Resolution	5MP	8MP	5MP	8MP	5MP	8MP	8MP	8MP
Lens	2.8-12MM	2.8-12MM	2.8-12MM	2.8-12MM	2.8-12MM	2.8-12MM	2.8-12MM	5.5-202MM
Lens Type	Motorized	Motorized	Motorized	Motorized	Motorized	Motorized	Motorized PTZ	Motorized PTZ
IR	50M	50M	45M	45M	45M	45M	30M	200M
Lux	0.002	0.007	0.002	0.007	0.002	0.007	0.009	0.0005
WDR	90dB	90dB	90dB	90dB	90dB	90dB	Digital	120dB
Microphone	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Speaker	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Audio In/Out	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
Alarm In/Out	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
Deterrence	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights	Red & Blue Deterrence Lights
Siren	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Night Vision	TotalView	TotalView	TotalView	TotalView	TotalView	TotalView	TotalView	TotalView
Mirco SD Card	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB
PoE	Max. 10.3W	Max. 10.7W	Max. 6.3W	Max. 9.2W	Max. 7.2W	Max. 8.6W	Max. 13W	36V DC / POE
Codec	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265
Color	White	White	White	White	White	White	White	White
Temperature	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-35~+60°C	-30~+60°C	-30~+65°C
IP & IK rating	IP67	IP66	IP67 IK10	IP67 IK10	IP67	IP67	IP66	IP67 IK10
Junction Box	B6BASE1	B6BASE1	EB3BASE3	EB3BASE3	EB3BASE3	EB3BASE3	N/A	N/A
Wall Mount	Included	Included	WMB5 OR WMB6 + EB3BASE3-G	WMB5 OR WMB6 + EB3BASE3-G	WMB5 OR WMB6 + EB3BASE3-G	WMB5 OR WMB6 + EB3BASE3-G	INCLUDED	INCLUDED
Ceiling Mount	N/A	N/A	CMB6-G + EB3BASE3-G	CMB6-G + EB3BASE3-G	CMB6-G + EB3BASE3-G	CMB6-G + EB3BASE3-G	N/A	CMB6-P
Compliance								
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

PTZD4XIP4MP-AI



- IMPACT RESISTANT
- 350° LONG RANGE
- SEE IN COLOR AT NIGHT
- SIREN & VOICE PROMPTS
- TWO-WAY COMMUNICATION
- MICRO SD CARD UP TO 256GB

XPTZ4XIP8MP-AI



- 350° LONG RANGE
- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- MICRO SD CARD UP TO 256GB

PTZ25XIP2MP-AI-N



- TRUE WDR
- AUTO-TRACKING
- 360° LONG RANGE
- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

PTZ33XIP5MP-AI-N



- STARLIGHT
- TRUE WDR
- AUTO-TRACKING
- 360° LONG RANGE
- ALARM/AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

XPTZ37XIP8MP-AI-N



- TRUE WDR
- AUTO-TRACKING
- 360° LONG RANGE
- ALARM/AUDIO IN/OUT
- SEE IN COLOR AT NIGHT
- TWO-WAY COMMUNICATION
- DETERRENCE LIGHTS & SIREN
- MICRO SD CARD UP TO 256GB

Resolution	4MP	8MP	2MP	5MP	8MP
Lens	2.8-12MM	2.8-12MM	5-125MM	4.3-142MM	5.5-202MM
Lens Type	Motorized	Motorized	Motorized	Motorized	Motorized
IR	20M	30M	100M	150M	200M
Lux	0.001	0.009	0.002	0.003	0.0005
WDR	120dB	Digital	120dB	120dB	120dB
Microphone	Yes	Yes	No	No	Yes
Speaker	Yes	Yes	No	No	Yes
Audio In/Out	No	No	Yes	Yes	Yes
Alarm In/Out	No	No	Yes	Yes	Yes
Night Vision	TotalView	TotalView	IR	IR	TotalView
Deterrence	No	Red & Blue Deterrence Lights	No	No	Red & Blue Deterrence Lights
Siren	Yes	Yes	No	No	Yes
Zoom	4X Optical Zoom	4X Optical Zoom	25X Optical Zoom	33X Optical Zoom	37X Optical 16X Digital Zoom
Mirco SD Card	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB
PoE	Max. 13W	Max. 13W	Max. 22W	Max. 25.6W	36V DC / POE
Codec	H264 H265	H264 H265	H264 H265	H264 H265	H264 H265
Color	White	White	White	White	White
Temperature	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+65°C
IP & IK rating	IP66 IK10	IP66	IP66	IP66	IP67 IK10
Junction Box	EB3BASE6	N/A	N/A	N/A	N/A
Wall Mount	WMB6	INCLUDED	PTZBASE1	PTZBASE1	PTZBASE1
Ceiling Mount	CMB6-G + EB3BASE6-G	N/A	CMB6-P	CMB6-P	CMB6-P
Compliance	Onvif 1.0 2.0 3.0 NDAA Compliant FCC CE	Onvif 1.0 2.0 3.0 NDAA Compliant FCC CE	Onvif 1.0 2.0 3.0 NDAA Compliant FCC CE	Onvif 1.0 2.0 3.0 NDAA Compliant FCC CE	Onvif 1.0 2.0 3.0 NDAA Compliant FCC CE
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

QUAD CAMERA
QUADZ2812IP32MP-AI



- TRUE WDR
- IMPACT RESISTANT
- 360° LONG RANGE
- AUDIO/ALARM IN/OUT
- SEE IN COLOR AT NIGHT
- 60W INJECTOR INCLUDED
- MICRO SD CARD UP TO 256GB

PINHOLE CAMERA
PIN20IP5MP-AI



- AUDIO IN/OUT

THERMAL CAMERA
B7T4IP5MP-AI



- NEW**
- TRUE WDR
 - DETERRENCE LIGHTS
 - ALARM/AUDIO IN/OUT
 - TEMPERATURE MEASUREMENT
 - MICRO SD CARD UP TO 256GB

LPR CAMERA
XLPRB92832IP8MP-AI



- NEW**
- TRUE WDR
 - AI+ FEATURES
 - IMPACT RESISTANT
 - SUPPORTS PRECISE IRIS
 - SEE IN FULL COLOR AT NIGHT
 - 2X ALARM/1X AUDIO IN/OUT
 - TWO-WAY COMMUNICATION
 - MICRO SD CARD UP TO 256GB

FLAT DOME CAMERA
FLF28D5MP-AI



- MICROPHONE
- COMPACT SIZE
- MICRO SD CARD UP TO 256GB

FISHEYE CAMERA
FE360IP12MP



- TWO-WAY COMMUNICATION
- MICRO SD CARD UP TO 256GB

DOORBELL CAMERA
DBWL5MP-POE



- NEW**
- WIFI TRANSMISSION
 - TWO-WAY COMMUNICATION
 - FULL HEAD TO TOE VIEW (9:16)
 - HUMAN & PACKAGE DETECTION
 - MICRO SD CARD SLOT UP TO 512GB

Resolution	4 X 8MP	5MP	5MP	8MP	5MP	12MP	5MP
Lens	4 X 2.8-12MM	2.0MM	3.6MM	8-32MM	2.8MM	2.0MM	2.1MM
Lens Type	Motorized	Fixed	Fixed	Motorized	Fixed	Fixed	Fixed
IR	30M	-	30M	100M	20M	10M	3M
Lux	0.006	0.004	0.003	0.0008	0.004	0.03	0
WDR	120dB	90dB	120dB	120dB	90dB	Digital	90dB
Microphone	No	No	No	Yes	Yes	Yes	Yes
Speaker	No	No	No	Yes	No	Yes	Yes
Audio In/Out	Yes	Yes	Yes	No	No	No	No
Alarm In/Out	Yes	No	Yes	No	No	No	No
Deterrence	No	No	Red & Blue Deterrence Lights	No	No	No	No
Siren	No	No	No	No	No	No	No
Night Vision	TotalView	No	No	Spectral	No	No	No
Mirco SD Card	Up to 256GB	No	Up to 256GB	Up to 256GB	Up to 256GB	Up to 256GB	Up to 512GB
PoE	Max. 43W	Max. 3.47W	Max. 10.4W	Max. 10.24W	Max. 4.5W	Max. 9.6W	Max. 9.84W
Codec	H264 H265	H264 H265	H264 H265+ MJPEG	H264 H265 MJPEG	H264 H265	H264 H265	H264 H265 MJPEG
Color	White	Black	White	White	White	White	Black
Temperature	-30~+55°C	-35~+60°C	-20~+150°C	-35~+60°C	-30~+60°C	-30~+60°C	-25~+55°C
IP & IK rating	IP67 IK10	-	IP67	IP67 IK10	IP66	IP66	IP65
Junction Box	PTZBASE1	N/A	TEBBASE1	TEBBASE1	D2BASE1	FEBASE	N/A
Wall Mount	Included	N/A	WMB6 + EB3BASE3-G OR WMB5	WMB6 + EB3BASE3-G OR WMB5	WMB6 + D2BASE1-G	WMB6 + FEBASE-G	N/A
Ceiling Mount	CMB6-P	N/A	N/A	N/A	CMB6-G + D2BASE1-G	CMB6-G + FEBASE-G	N/A
Compliance	ONVIF			ONVIF	ONVIF	ONVIF	ONVIF
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS

GSD-NVRFNC4K-04-N 



GSD-NVRFNC4K-08-N 




GSD-NVRFNC6K-16-N 



GSD-NVRFNC4K-32NP-N 







































GSD-NVRFNC4K-64NP-N 



GSD-NVRFNC4K-256NP 



Resolution	8MP	8MP	12MP	8MP	12MP	12MP
IP Channels	4	8	16	32	64	256
PoE Ports	4	8	16	0	0	0
Bandwidth	50Mbps	128Mbps	320Mbps	256Mbps	640Mbps	1024Mbps
HDDs	1	1	2	8	8	16
E-SATA	0	0	1	1	1	1
Raid	No	No	No	No	Yes	Yes
HDMI Outputs	1	1	2	2	4	4
HDMI Spot Monitor	0	0	Yes	Yes	Yes	Yes
VGA	Yes	Yes	Yes	Yes	Yes	Yes
Alarm In/Out (Relays)	0	0	16 in / 4 out	16 in / 4 out	16 in / 4 out	16 in / 4 out
Audio Outputs	1	1	1	1	1	1
Format	Compact	Compact	1U	2U	2U	3U
Rackmount Compatible	No	No	Yes	Yes	Yes	Yes
E-POE	Yes	Yes	Yes	No	No	No
Power Input	DC48V/1.2A	DC48V/1.5A	ATX 280W	ATX 250W	ATX 250W	ATX 250W
Power Consumption	5W	6W	12W	12W	8W	8W
Compliance	   	   	   	   	   	   
Download	DATASHEET VIDEO  	DATASHEET VIDEO  	DATASHEET VIDEO  	DATASHEET VIDEO  	DATASHEET VIDEO  	DATASHEET VIDEO  

Eyeball

Turret

Dome

Bullet

X Series

PTZ

Speciality IP

NVRS



Resolution	12MP	12MP	12MP	12MP	12MP	12MP
IP Channels	4	8	16	32	64	256
PoE Ports	4	8	16	0	0	0
Bandwidth	76Mbps	128Mbps	320Mbps	320Mbps	640Mbps	1024Mbps
HDDs	1	1	2	8	8	16
E-SATA	0	0	1	1	1	1
Raid	No	No	No	No	Yes	Yes
HDMI Outputs	1	1	2	2	4	4
HDMI Spot Monitor	0	0	Yes	Yes	Yes	Yes
VGA	Yes	Yes	Yes	Yes	Yes	Yes
Alarm In / Out (Relays)	0	0	16 in / 4 out	16 in / 4 out	16 in / 4 out	16 in / 4 out
Audio Outputs	1	1	1	1	1	1
Format	Compact	Compact	1U	2U	2U	3U
Rackmount Compatible	No	Yes	Yes	Yes	Yes	Yes
E-POE	Yes	Yes	Yes	No	No	No
Power Input	48V/1.2A	48V/1.5A	ATX 280W	ATX 280W	ATX 250W	ATX 250W
Power Consumption (Without HDD)	3.8W	4.3W	12W	12W	8W	8W
Compliance	Onvif 1.0, NDAA, FCC, CE	Onvif 1.0, NDAA, FCC, CE	Onvif 1.0, NDAA, FCC, CE	Onvif 1.0, NDAA, FCC, CE	Onvif 1.0, NDAA, FCC, CE	Onvif 1.0, NDAA, FCC, CE
Download	DATASHEET VIDEO Available on the App Store GET IT ON Google Play	DATASHEET VIDEO Available on the App Store GET IT ON Google Play	DATASHEET VIDEO Available on the App Store GET IT ON Google Play	DATASHEET VIDEO Available on the App Store GET IT ON Google Play	DATASHEET VIDEO Available on the App Store GET IT ON Google Play	DATASHEET VIDEO Available on the App Store GET IT ON Google Play

Analog Cameras

DVRs

HD Analog Accessories

TEBF28AIO-5MP
TEBF28AIO-5MP-B



MICROPHONE

TEBF28AIO-8MP
TEBF28AIO-8MP-B



TEBFTV28AIO-5MP
TEBFTV28AIO-5MP-B



MICROPHONE
SEE IN COLOR AT NIGHT

T2F28AIO-5MP



AUDIO IN/OUT

T2F28AIO-8MP



AUDIO IN/OUT

T3Z2812AIO-5MP



TRUE WDR

Resolution	5MP	8MP	5MP	5MP	8MP	5MP
Lens	2.8MM	2.8MM	2.8MM	2.8MM	2.8MM	2.7-13.5MM
Lens Type	Fixed	Fixed	Fixed	Fixed	Fixed	Motorized
IR	30M	30M	30M	20M	20M	35M
Lux	0.01	0.05	0.05	0.05	0.05	0.02
WDR	Digital	Digital	90dB	Digital	Digital	120dB
Power	12V 0.4A	12V 0.4A	12V 0.4A	12V 0.5A	12V 0.5A	12V 0.5A
Signal	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H
Color	White or Black	White or Black	White or Black	White	White	White
Temperature	-30~+55°C	-30~+55°C	-30~+55°C	-30~+55°C	-30~+55°C	-30~+55°C
IP & IK rating	IP66	IP66	IP66	IP66	IP66	IP66
Junction Box	TEBBASE	TEBBASE	TEBBASE	EB3BASE4	EB3BASE4	EB3BASE3
Wall Mount	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB2 OR WMB6 + TEBBASE1-G	WMB5 OR WMB6 + EB3BASE4-G	WMB5 OR WMB6 + EB3BASE4-G	WMB5 OR WMB6 + EB3BASE3-G
Ceiling Mount	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + TEBBASE1-G	CMB6-G + EB3BASE4-G	CMB6-G + EB3BASE4-G	CMB6-G + EB3BASE3-G
Compliance	FC CE	FC CE	FC CE	FC CE	FC CE	FC CE
Download	DATASHEET	DATASHEET	DATASHEET	DATASHEET	DATASHEET	DATASHEET

Analog Cameras

DVRs

HD Analog Accessories

D2F28AIO-5MP



IMPACT RESISTANT

D6Z2812AIO-5MP



TRUE WDR
IMPACT RESISTANT

B2F28AIO-5MP-M



MICROPHONE

B7Z2812AIO-5MP



PTZ20XTVI



360° LONG RANGE
20X OPTICAL ZOOM
CONTROL BY RS-485*

CVT37IR



MOVEMENT DETECTION

Resolution	5MP	5MP	5MP	5MP	2MP	2MP
Lens	2.8MM	2.8-12MM	2.8MM	2.8-12MM	4.7-84.6MM	3.7MM
Lens Type	Fixed	Motorized	Fixed	Motorized	Motorized	Fixed
IR	15M	30M	25M	30M	120M	10M
Lux	0.05	0.05	0.05	0.05	0.05	0.01
WDR	Digital	120dB	Digital	Digital	Digital	Digital
Power	12V 0.6A	12V 0.6A	12V 0.4A	12V 0.4A	12V 3A	12V 0.6A
Signal	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H	TVI-CVI-AHD-960H
Color	White	White	White	White	White	White
Temperature	-30~+55°C	-30~+55°C	-30~+55°C	-30~+55°C	-40~+60°C	-10~+50°C
IP & IK rating	IP66 IK10	IP66 IK10	IP66	IP66	IP66	N/A
Junction Box	D2BASE1	EB3BASE3	B6BASE1	B6BASE1	N/A	N/A
Wall Mount	WMB2 OR WMB6 + D2BASE1-G	WMB5 OR WMB6 + EB3BASE3-G	INCLUDED	INCLUDED	INCLUDED	INCLUDED
Ceiling Mount	CMB6-G + D2BASE1-G	CMB6-G + EB3BASE3-G	N/A	N/A	CMB6-P	N/A
Compliance	FC CE	FC CE	FC CE	FC CE	FC CE	FC CE
Download	DATASHEET	DATASHEET	DATASHEET	DATASHEET	DATASHEET	DATASHEET

Analog Cameras

DVRs

HD Analog Accessories



Resolution	8MP	8MP	8MP	5MP LITE
BNC Channels	4	8	16	32
IP Cameras	Up to 6	Up to 12	Up to 24	Up to 4
Spot Monitor Out	On BNC	On BNC	On BNC	On BNC / HDMI
FPS	Up to 30 @ 4K	Up to 30 @ 4K	Up to 30 @ 4K	Up to 15 @ 3.9MP
Max. HDDs	1	1	2	4
Max. HDD Storage	Up to 16TB	Up to 16TB	Up to 16TB	Up to 16TB
E-SATA	0	0	1	1
HDMI Outputs	1	1	1	2
Alarm Inputs	4	8	16	16
Audio In / Out (Relays)	4 in / 1 out	8 in / 1 out	16 in / 1 out	8 in / 1 out
ONVIF Encoder	Yes	Yes	Yes	Yes
Video Out	HDMI 4K VGA 1080P	HDMI 4K VGA 1080P	HDMI 4K VGA 1080P	2X HDMI 4K VGA 1080P
Signal	TVI-CVI-AHD-CBVS	TVI-CVI-AHD-CBVS	TVI-CVI-AHD-CBVS	TVI-CVI-AHD-CBVS
Techno	TVI/CVI/AHD/ANALOG/IP	TVI/CVI/AHD/ANALOG/IP	TVI/CVI/AHD/ANALOG/IP	TVI/CVI/AHD/ANALOG/IP
Power	DC12V/3A	DC12V/3A	DC 12V/5A	DC12V/5A
Compliance	Onvif1000 NDAA FC CE	Onvif1000 NDAA FC CE	Onvif1000 NDAA FC CE	Onvif1000 NDAA FC CE
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

Analog Cameras

DVRs

HD Analog Accessories



BALUN OVER TWISTED PAIR



GROUND LOOP ISOLATOR



VIDEO / POWER / AUDIO OVER CAT5

Model #

BALUNHD

GRDLOOPHD

BALUNHDA+

Distance

UP TO 1400 FEET

UP TO 700 FEET

UP TO 1400 FEET

Format

PIGTAIL

N/A

PIGTAIL

Details

2MP / 5MP / 8MP

ELIMINATE VIDEO-SIGNAL DISTORTION

VIDEO POWER AUDIO

Package

PAIR

UNIT

PAIR

Techno

TVI/CVI/AHD/ANALOG

TVI/CVI/AHD/ANALOG

TVI/CVI/AHD/ANALOG

SMB1-12SVR2U650W-XXT



SMB2-12SVR2U650W-XXT



SMB3-12SVR2U650W-XXT



SMB1-24SVR4U850W-XXT



SMB2-24SVR4U850W-XXT



SMB3-24SVR4U850W-XXT



High Performance Rackmount Server

CUSTOMIZE YOUR SERVER TO YOUR SPECIFIC NEEDS!

SCALABLE SOLUTION

UP TO 480TB

UP TO 10GBE NETWORKS

RACKMOUNT FRIENDLY

OPTIONAL REDUNDANT POWER SUPPLY

Pre-Configured with windows 11 pro software of your choice.

Choose Your Hard Drive Capacity To Fit Your Requirements

Call Our Sales Representative For More Information!

Configuration	12-Bay i5 (Low Tier)	12-Bay i7 (Mid Tier)	12-Bay i9 (High Tier)	24-Bay i5 (Low Tier)	24-Bay i7 (Mid Tier)	24-Bay i9 (High Tier)
Format	2U	2U	2U	4U	4U	4U
CPU Model	Intel Core i5-13600K	Intel Core i7-13700K	Intel Core i9-14900K	Intel Core i5-13600K	Intel Core i7-13700K	Intel Core i9-14900K
OS Drive	1TB NVMe	1TB NVMe	1TB NVMe	1TB NVMe	1TB NVMe	1TB NVMe
RAID Type	None (JBOD)	Hardware RAID (0, 1, 5, 6, 10)	Hardware RAID (0, 1, 5, 6, 10)	None (JBOD)	Hardware RAID (0, 1, 5, 6, 10)	Hardware RAID (0, 1, 5, 6, 10)
RAM	16GB	32GB	64GB	16GB	32GB	64GB
Power Supply	650W (Standard)	650W (Gold)	650W (Platinum, Redundant)	850W (Standard)	850W (Gold)	850W (Platinum, Redundant)
GPU Model	NVIDIA RTX 4060 (Low Profile)	NVIDIA RTX 4060 (Low Profile)	NVIDIA RTX 4060 (Low Profile)	NVIDIA RTX 4050	NVIDIA RTX 4070	NVIDIA RTX 4080
VRAM	8GB	8GB	8GB	8GB	8GB	16GB
HDMI Ports (GPU)	1x HDMI 2.1	1x HDMI 2.1	1x HDMI 2.1	1x HDMI 2.1	1x HDMI 2.1	1x HDMI 2.1
HDMI Port (Motherboard)	1x HDMI 2.0 (Integrated)	1x HDMI 2.0 (Integrated)	1x HDMI 2.0 (Integrated)	1x HDMI 2.0 (Integrated)	1x HDMI 2.0 (Integrated)	1x HDMI 2.0 (Integrated)
Display Ports	2x DisplayPort 1.4a	2x DisplayPort 1.4a	2x DisplayPort 1.4a	2x DisplayPort 1.4a	2x DisplayPort 1.4a	3x DisplayPort 1.4a
Network Port	2 x 2.5GbE	2 x 2.5GbE	1 x 2.5GbE & 1 x 10GbE	2 x 2.5GbE	1 x 2.5GbE & 1 x 10GbE	1 x 2.5GbE & 1 x 10GbE
Accessories	Wireless Mouse & Keyboard, Rackmount Brackets & Rails, Windows 11Pro License	Wireless Mouse & Keyboard, Rackmount Brackets & Rails, Windows 11Pro License	Wireless Mouse & Keyboard, Rackmount Brackets & Rails, Windows 11Pro License	Wireless Mouse & Keyboard, Rackmount Brackets & Rails, Windows 11Pro License	Wireless Mouse & Keyboard, Rackmount Brackets & Rails, Windows 11Pro License	Wireless Mouse & Keyboard, Rackmount Brackets & Rails, Windows 11Pro License
Hard Drive Variations (XXT)	32TB, 64TB, 96TB, 128TB, 192TB	32TB, 64TB, 96TB, 128TB, 192TB	32TB, 64TB, 96TB, 128TB, 192TB	64TB, 96TB, 128TB, 192TB, 256TB 384TB, 480TB	64TB, 96TB, 128TB, 192TB, 256TB 384TB, 480TB	64TB, 96TB, 128TB, 192TB, 256TB 384TB, 480TB
Compliance	Onvif 1000 NDAA FC CE	Onvif 1000 NDAA FC CE	Onvif 1000 NDAA FC CE	Onvif 1000 NDAA FC CE	Onvif 1000 NDAA FC CE	Onvif 1000 NDAA FC CE
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO

X Series

Network

Analog

XKITOV4IP4MP-AI-E

1X GSD-NVROV6K-04-N
AKA GSD-NVRFNC4K-04-N
+
4X XEBFATVIP4MP28-AI-E
or
4X XEBFATVIP4MP28-AI-E-B



LIMITED A

- ⦿ DETERRENCE LIGHTS
- ⦿ SEE IN COLOR AT NIGHT
- ⦿ MICROPHONE, SPEAKER & SIREN
- ⦿ 64GB MICRO SD CARD INCLUDED

XKITOV6IP4MP-AI-E

1X GSD-NVROV6K-08-N
AKA GSD-NVRFNC4K-08-N
+
6X XEBFATVIP4MP28-AI-E
or
6X XEBFATVIP4MP28-AI-E-B



LIMITED A

- ⦿ DETERRENCE LIGHTS
- ⦿ SEE IN COLOR AT NIGHT
- ⦿ MICROPHONE, SPEAKER & SIREN
- ⦿ 64GB MICRO SD CARD INCLUDED

XKITOV12IP4MP-AI-E

1X GSD-NVROV6K-16-N
AKA GSD-NVRFNC6K-16-N
+
12X XEBFATVIP4MP28-AI-E
or
12X XEBFATVIP4MP28-AI-E-B



LIMITED A

- ⦿ DETERRENCE LIGHTS
- ⦿ SEE IN COLOR AT NIGHT
- ⦿ MICROPHONE, SPEAKER & SIREN
- ⦿ 64GB MICRO SD CARD INCLUDED

XKITOV4IP8MP-AI

1X GSD-NVROV6K-04-N
AKA GSD-NVRFNC4K-04-N
+
4X XEBATVIP8MP28-AI-L-64G
or
4X XEBATVIP8MP28-AI-L-B-64G



A

- ⦿ DETERRENCE LIGHTS
- ⦿ SEE IN COLOR AT NIGHT
- ⦿ MICROPHONE, SPEAKER & SIREN
- ⦿ 64GB MICRO SD CARD INCLUDED

XKITOV6IP8MP-AI

1X GSD-NVROV6K-08-N
AKA GSD-NVRFNC4K-08-N
+
6X XEBATVIP8MP28-AI-L-64G
or
6X XEBATVIP8MP28-AI-L-B-64G



A

- ⦿ DETERRENCE LIGHTS
- ⦿ SEE IN COLOR AT NIGHT
- ⦿ MICROPHONE, SPEAKER & SIREN
- ⦿ 64GB MICRO SD CARD INCLUDED

XKITOV12IP8MP-AI

1X GSD-NVROV6K-16-N
AKA GSD-NVRFNC6K-16-N
+
12X XEBATVIP8MP28-AI-L-64G
or
12X XEBATVIP8MP28-AI-L-B-64G



A

- ⦿ DETERRENCE LIGHTS
- ⦿ SEE IN COLOR AT NIGHT
- ⦿ MICROPHONE, SPEAKER & SIREN
- ⦿ 64GB MICRO SD CARD INCLUDED

Resolution	4MP	4MP	4MP	8MP	8MP	8MP
Channels	4	8	16	4	8	16
HDD	1	1	2	1	1	2
Alarm/Audio	In/Out	In/Out	In/Out	In/Out	In/Out	In/Out
Color	White or Black	White or Black	White or Black	White or Black	White or Black	White or Black
HDD Storage	0TB, 1TB, 2TB	0TB, 2TB, 4TB, 8TB	0TB, 4TB, 8TB, 16TB	0TB, 1TB, 2TB	0TB, 2TB, 4TB, 8TB	0TB, 4TB, 8TB, 16TB
Kit Variations	XKITOV4IP4MP-AI-E XKITOV4IP4MP-AI-E-1T XKITOV4IP4MP-AI-E-2T XKITOV4IP4MP-AI-E-B XKITOV4IP4MP-AI-E-B-1T XKITOV4IP4MP-AI-E-B-2T	XKITOV6IP4MP-AI-E XKITOV6IP4MP-AI-E-2T XKITOV6IP4MP-AI-E-4T XKITOV6IP4MP-AI-E-8T XKITOV6IP4MP-AI-E-B XKITOV6IP4MP-AI-E-B-2T XKITOV6IP4MP-AI-E-B-4T XKITOV6IP4MP-AI-E-B-8T XKITOV6IP4MP-AI-E-B-8T	XKITOV12IP4MP-AI-E XKITOV12IP4MP-AI-E-4T XKITOV12IP4MP-AI-E-8T XKITOV12IP4MP-AI-E-16T XKITOV12IP4MP-AI-E-B XKITOV12IP4MP-AI-E-B-4T XKITOV12IP4MP-AI-E-B-8T XKITOV12IP4MP-AI-E-B-8T	XKITOV4IP8MP-AI XKITOV4IP8MP-AI-1T XKITOV4IP8MP-AI-2T XKITOV4IP8MP-AI-B XKITOV4IP8MP-AI-B-1T XKITOV4IP8MP-AI-B-2T	XKITOV6IP8MP-AI XKITOV6IP8MP-AI-2T XKITOV6IP8MP-AI-4T XKITOV6IP8MP-AI-8T XKITOV6IP8MP-AI-B XKITOV6IP8MP-AI-B-2T XKITOV6IP8MP-AI-B-4T XKITOV6IP8MP-AI-B-8T	XKITOV12IP8MP-AI XKITOV12IP8MP-AI-4T XKITOV12IP8MP-AI-8T XKITOV12IP8MP-AI-16T XKITOV12IP8MP-AI-B XKITOV12IP8MP-AI-B-4T XKITOV12IP8MP-AI-B-8T XKITOV12IP8MP-AI-B-16T

X Series

Network

Analog

KITOV4IP5MP-AI

1X GSD-NVROV6K-04-N
AKA GSD-NVRFNC4K-04-N
+
4X TEBFDAIP5MP28-AI-L
or
4X TEBFDAIP5MP28-AI-L-B



- AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

KITOV6IP5MP-AI

1X GSD-NVROV6K-08-N
AKA GSD-NVRFNC4K-08-N
+
6X TEBFDAIP5MP28-AI-L
or
6X TEBFDAIP5MP28-AI-L-B



- AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

KITOV12IP5MP-AI

1X GSD-NVROV6K-16-N
AKA GSD-NVRFNC6K-16-N
+
12X TEBFDAIPMP28-AI-L
or
12X TEBFDAIP5MP28-AI-L-B



- AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

KITOV4IP8MP-AI

1X GSD-NVROV6K-04-N
AKA GSD-NVRFNC4K-04-N
+
4X TEBFDAIP8MP28-AI-L
or
4X TEBFDAIP8MP28-AI-L-B



- AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

KITOV6IP8MP-AI

1X GSD-NVROV6K-08-N
AKA GSD-NVRFNC4K-08-N
+
6X TEBFDAIP8MP28-AI-L
or
6X TEBFDAIP8MP28-AI-L-B



- AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

KITOV12IP8MP-AI

1X GSD-NVROV6K-16-N
AKA GSD-NVRFNC6K-16-N
+
12X TEBFDAIP8MP28-AI-L
or
12X TEBFDAIP8MP28-AI-L-B



- AUDIO IN/OUT
- MICRO SD CARD UP TO 256GB

Resolution	5MP	5MP	5MP	8MP	8MP	8MP
Channels	4	8	16	4	8	16
HDD	1	1	2	1	1	2
Alarm/Audio	Audio In/Out	Audio In/Out	Audio In/Out	Audio In/Out	Audio In/Out	Audio In/Out
Color	White or Black	White or Black	White or Black	White or Black	White or Black	White or Black
HDD Storage	0TB, 1TB, 2TB	0TB, 2TB, 4TB, 8TB	0TB, 4TB, 8TB, 16TB	0TB, 1TB, 2TB	0TB, 2TB, 4TB, 8TB	0TB, 4TB, 8TB, 16TB
Kit Variations	KITOV4IP5MP-AI KITOV4IP5MP-AI-1T KITOV4IP5MP-AI-2T KITOV4IP5MP-AI-B KITOV4IP5MP-AI-B-1T KITOV4IP5MP-AI-B-2T	KITOV6IP5MP-AI KITOV6IP5MP-AI-2T KITOV6IP5MP-AI-4T KITOV6IP5MP-AI-8T KITOV6IP5MP-AI-B KITOV6IP5MP-AI-B-2T KITOV6IP5MP-AI-B-4T KITOV6IP5MP-AI-B-8T	KITOV12IP5MP-AI KITOV12IP5MP-AI-4T KITOV12IP5MP-AI-8T KITOV12IP5MP-AI-16T KITOV12IP5MP-AI-B KITOV12IP5MP-AI-B-4T KITOV12IP5MP-AI-B-8T KITOV12IP5MP-AI-B-16T	KITOV4IP8MP-AI KITOV4IP8MP-AI-1T KITOV4IP8MP-AI-2T KITOV4IP8MP-AI-B KITOV4IP8MP-AI-B-1T KITOV4IP8MP-AI-B-2T	KITOV6IP8MP-AI KITOV6IP8MP-AI-2T KITOV6IP8MP-AI-4T KITOV6IP8MP-AI-8T KITOV6IP8MP-AI-B KITOV6IP8MP-AI-B-2T KITOV6IP8MP-AI-B-4T KITOV6IP8MP-AI-B-8T	KITOV12IP8MP-AI KITOV12IP8MP-AI-4T KITOV12IP8MP-AI-8T KITOV12IP8MP-AI-16T KITOV12IP8MP-AI-B KITOV12IP8MP-AI-B-4T KITOV12IP8MP-AI-B-8T KITOV12IP8MP-AI-B-16T

X Series

Network

Analog

KIT4AIO5MP-AI

1X GSD-DVRFNC4K-04-N-AI
+
4X TEBF28AIO-5MP
or
4X TEBF28AIO-5MP-B



MICROPHONE

KIT6AIO5MP-AI

1X GSD-DVRFNC4K-08-N-AI
+
6X TEBF28AIO-5MP
or
6X TEBF28AIO-5MP-B



MICROPHONE

KIT4AIO5MP-AI

1X GSD-DVRFNC4K-16-N-AI
+
12X TEBF28AIO-5MP
or
12X TEBF28AIO-5MP-B



MICROPHONE

KIT4AIO5MP-AI

1X GSD-DVRFNC4K-04-N-AI
+
4X TEBF28AIO-8MP
or
4X TEBF28AIO-8MP-B



MICROPHONE

KIT6AIO5MP-AI

1X GSD-DVRFNC4K-08-N-AI
+
6X TEBF28AIO-8MP
or
6X TEBF28AIO-8MP-B



MICROPHONE

KIT12AIO5MP-AI

1X GSD-DVRFNC4K-16-N-AI
+
12X TEBF28AIO-8MP
or
12X TEBF28AIO-8MP-B



MICROPHONE

Resolution	5MP	5MP	5MP LITE	8MP	8MP	8MP
Channels	4	8	16	4	8	16
HDD	1	1	2	1	1	2
Alarm/Audio	Audio over coaxial	Audio over coaxial	Audio over coaxial	Audio over coaxial	Audio over coaxial	Audio over coaxial
Color	White or Black	White or Black	White or Black	White or Black	White or Black	White or Black
HDD Storage	0TB, 1TB, 2TB	0TB, 1TB, 2TB, 4TB	0TB, 4TB, 8TB, 16TB	0TB, 2TB, 4TB	0TB, 2TB, 4TB, 8TB	0TB, 4TB, 8TB, 16TB
Kit Variations	KIT4AIO5MP-AI KIT4AIO5MP-AI-1T KIT4AIO5MP-AI-2T KIT4AIO5MP-AI-B KIT4AIO5MP-AI-B-1T KIT4AIO5MP-AI-B-2T	KIT6AIO5MP-AI KIT6AIO5MP-AI-1T KIT6AIO5MP-AI-2T KIT6AIO5MP-AI-4T KIT6AIO5MP-AI-B KIT6AIO5MP-AI-B-1T KIT6AIO5MP-AI-B-2T KIT6AIO5MP-AI-B-4T	KIT12AIO5MP-AI KIT12AIO5MP-AI-4T KIT12AIO5MP-AI-8T KIT12AIO5MP-AI-16T KIT12AIO5MP-AI-B KIT12AIO5MP-AI-B-4T KIT12AIO5MP-AI-B-8T KIT12AIO5MP-AI-B-16T	KIT4AIO8MP-AI KIT4AIO8MP-AI-2T KIT4AIO8MP-AI-4T KIT4AIO8MP-AI-B KIT4AIO8MP-AI-B-2T KIT4AIO8MP-AI-B-4T	KIT6AIO8MP-AI KIT6AIO8MP-AI-2T KIT6AIO8MP-AI-4T KIT6AIO8MP-AI-8T KIT6AIO8MP-AI-B KIT6AIO8MP-AI-B-2T KIT6AIO8MP-AI-B-4T KIT6AIO8MP-AI-B-8T	KIT12AIO8MP-AI KIT12AIO8MP-AI-4T KIT12AIO8MP-AI-8T KIT12AIO8MP-AI-16T KIT12AIO8MP-AI-B KIT12AIO8MP-AI-B-4T KIT12AIO8MP-AI-B-8T KIT12AIO8MP-AI-B-16T

WIRELESS ACCESSORIES

BATTERY
BAT-WLFNC



CABLE
PWR-WL5V-2A

- 15 FEET
- 5V - 2AMP
- WIRE PROTECTION



B2F28WL-8MP



- PIR
- WIRELESS WIFI CAMERA
- MICROPHONE & SPEAKER
- BATTERY NOT INCLUDED
- 64GB MICRO SD CARD INCLUDED

Resolution	8MP
Lens	2.8MM
Lens Type	Fixed
IR	Up to 15M
Lux	0
WDR	N/A
PoE	Max. 4W
Codec	H264 H265
Color	White
Temperature	-20°C ~ +50°C
IP & IK rating	IP66
Wifi Transmission Distance	Max 700M (with no interference)
Compliance	Onvif NDAA FC CE
Download	DATASHEET VIDEO

GSD-NVRWLFNC4K-08



Resolution	8MP
Channels	8
IP Cameras	Up to 6
USB Ports	3
Battery Backup	Yes
Max. HDD Storage	Up to 6TB
HDD Slots	1
HDMI Slots	1
HaLow Wifi	400M
FPS	4K UHD @ 15fps
ONVIF Encoder	Yes
Video Out	HDMI 4K VGA 1080P
Compliance	Onvif NDAA FC CE
Download	DATASHEET VIDEO Available on the App Store Get it on Google Play

KITWLHL4K-08

- 1X GSD-NVRWLFNC4K-08
- 1X 2TB HARD DRIVE
- 6X B2F28WL-8MP
- 6X PWR-WL5V-2A
- 6X BAT-WLFNC



- PIR
- MICROPHONE & SPEAKER
- ZOOM WIFI TRANSMISSION DISTANCE

Resolution	8MP
Channels	8
HDD	1
Lens	2.8MM
IR	15M
Color	White
Codec	H264/H265
POE	Max. 4.5W
Temperature	-20~+50°C
IP Rating	IP66
Download	DATASHEET

FEATURES

- 1GHZ HALOW WIFI TECHNOLOGY
- TRANSMISSION DISTANCE UP TO 1000FT
- 4K IMAGE RESOLUTION
- BATTERY BACKUP
- POWER SUPPLY INCLUDED
- DETERRENCE LIGHT (FLASHING WHITE LED)
- MICROPHONE & SPEAKER

B2FWLIP4MP-AI-64G



- SEE IN COLOR AT NIGHT
- WIRELESS WIFI CAMERA
- DETERRENCE LIGHTS & SIREN
- TWO-WAY COMMUNICATION
- 64GB MICRO SD CARD INCLUDED

PTWLIP4MP-AI-64G



- SEE IN COLOR AT NIGHT
- WIRELESS WIFI CAMERA
- DETERRENCE LIGHTS & SIREN
- TWO-WAY COMMUNICATION
- 64GB MICRO SD CARD INCLUDED

DBW5MP-B-64G



- MATRIX LED UP TO 30M
- WIRELESS WIFI DOORBELL
- DUAL WIDE ANGLE VIEW 160°
- TWO-WAY COMMUNICATION
- HUMAN & PACKAGE DETECTION
- 64GB MICRO SD CARD INCLUDED

LUXICAM

WiFi Consumer Solution

INNOVATIVE WIFI SOLUTION WITH EDGE RECORDING WHICH INCLUDES DOORBELLS BULLET AND PAN-TILT CAMERAS, DESIGNED TO SIMPLIFY A HOMEOWNER'S DAY TO DAY CHALLENGES

Resolution	4MP	4MP	5MP
Lens	2.8MM	2.8MM	2.8MM
Lens Type	Fixed	Fixed	Fixed
IR	Up to 10M	Up to 25M	Up to 7M
Lux	0.005	0.06	0.005
WDR	Digital	Digital	Digital
Power	DC 12V	DC 12V	AC 8-24 V
Codec	H264 H265	H264 H265	H264 H265
Color	White	White	Black
Temperature	-35°C ~ +60°C	-20°C ~ +50°C	-20°C ~ +55°C
IP rating	IP66	IP66	IP66
Compliance			
Download	DATASHEET VIDEO	DATASHEET VIDEO	DATASHEET VIDEO



SCARE INTRUDERS AWAY

ACTIVATE DETERRENCE LIGHTS DIRECTLY FROM YOUR PHONE



SEE IN COLOR AT NIGHT

SEE IN FULL COLOR AT NIGHT WITH THE INTEGRATED SPOTLIGHT



DETECTION ALERTS

DETECT HUMANS OR PACKAGES & GET REAL-TIME NOTIFICATIONS



TALK & LISTEN

COMMUNICATE BOTH WAYS WITH THE BUILT-IN MICROPHONE & SPEAKER



SIMPLE INSTALLATION

WIFI CONNECTION - NO NEED TO PASS CABLES THROUGH YOUR HOME



EASY APP SETUP

EASILY CONNECT TO YOUR CAMERA BY SCANNING THE QR CODE

2K

HD VIDEO QUALITY

CAPTURE CRYSTAL-CLEAR FOOTAGE WITH HIGH-DEFINITION VIDEO RESOLUTION



EDGE RECORDING (64GB INCLUDED)

NO RECORDER NEEDED - 64GB SD CARD STORES FOOTAGE DIRECTLY ON YOUR CAMERA



BATTERY POWERED DOORBELL

ENJOY WIRELESS CONVENIENCE WITH LONG-LASTING BATTERY POWER

COMPATIBLE WITH OUR O.V. CONNECT APP















Network Accessories

Mounting Accessories

PoE Switches

Speakers

Power Supplies

	Model #	Port	PoE	Uplink	Power Out	Format	Power In	Bandwidth	
	EXTPOE	1	Yes	N/A	15.5W	802.3AF	POE	10/100	
	EXT-2POE	2	Yes	1	30W	802.3AF/AT	POE + 25W	10/100/1000	
	EXT-4POE	4	Yes	1	25.5W	802.3AF	POE + 25W	10/100	
	EXT-4POE++	4	Yes	1	90W	802.3AF/B	POE ++ 90W	10/100/1000	
	INJPOE-25W	1	Yes	1	25W	802.3AT	48V / 2.5A	10/100/1000	
	INJPOE-90W	1	Yes	1	90W	802.3AT/B	48V / 2.5A	10/100/1000	
	IPCOAX-300M	1	Yes	N/A	25W	802.3AF/AT	120V	10/100	
	EXT-KVM	N/A	N/A	N/A	N/A	HDMI	5V	N/A	
	MON-TEST-7P	2	Yes	Yes	48V	7"	12V	N/A	
	IPCOAX-KIT8	1	Yes	Yes	150W	802.3AF/AT	120V	GIGA	NEW
	IPCOAX4C-300M	4	Yes	1	30W	802.3AF/AT	56V / POE	10/100Mbps	NEW
	EXTPOE-GB-1K	1	Yes	Yes	30W	802.3AT	56V / POE	10/100Mbps	NEW

















Network Accessories


Mounting Accessories

PoE Switches

Speakers

Power Supplies

MODEL #	COLOR	DETAILS & COMPATIBILITY
 EB3BASE3 EB3BASE3-B	White Black	Junction Box D6 XD6 T3 XT3
 EB3BASE3-G	White	Pendant Junction Box D6 XD6 T3 XT3
 EB3BASE4 EB3BASE4-B	White Black	Junction Box T2 TEB XEB XB8
 EB3BASE4-G	White	Suspended Junction Box T2 TEB XEB XB8
 FEBASE	White	Junction Box FISHEYE
 FEBASE-G	White	Pendant Junction Box FISHEYE
 TEBBASE1 TEBBASE1-B	White Black	Junction Box TEB XEB XB7F
 TEBBASE1-G TEBBASE1-G-B	White Black	Pendant Junction Box TEB XEB XB7F
 CMB6-P	White	Ceiling Mount DBASEX-P PTZXX QUAD
 CMB6-G	White	Ceiling Mount For BASES -G
 DBASEC	White	Junction Box TEB D2 XEB B7 XB7
 DBASEC-P	White	Pendant Bracket FITS DBASEC
 COMB6	White	Corner Mount Bracket
 PTZBASE1	White	Heavy Duty Junction Box WMB6 WMB8
 CMB6-EXT-150 CMB6-EXT-B-150	White Black	Telescopic Mount 61"-120" (Ø150MM) T3Z XT3Z T2 XT2 D6 XD6Z
 EB3BASE6	White	Junction Box XT2 PTZD NEW

MODEL #	COLOR	DETAILS & COMPATIBILITY
 D2BASE1 D2BASE1-B	White Black	Junction Box D2 FLF
 D2BASE1-G D2BASE1-G-B	White Black	Pendant Junction Box D2 FLF
 WMB2 WMB2-B	White Black	Wallmount Bracket TEB XEB XSEB D2
 WMB5 WMB5-B	White Black	Wallmount Bracket D6 XT2 T2 T3 XT3 PTZD
 WMB6 WMB6-B	White Black	Wallmount Bracket FITS -G PENDANT
 WMB8	White	Wallmount Bracket DBASEX DBASEC (X) PTZ QUAD
 DCMB2	White	Suspended Ceiling Bracket D2 XD2
 DCMB6	White	Suspended Ceiling Bracket D6 XD6
 PMB6	White	Pole Mount Bracket D6 XD6 T3 XT3
 B6BASE1	White	Junction Box B2 B6 B7 B8
 DBASEX	White	Junction Box D6 XD6 T3 XT3 B7 XB7
 DBASEX-P	White	Pendant Bracket FITS DBASEX
 ECVR ECVR-B	White Black	Large Camera Cover D6 XD6 T3 XT3
 D6-CAP	White	Camera Cover D6 XD6
 CMB6-EXT-120 CMB6-EXT-B-120	White Black	Telescopic Mount 61"-120" (Ø120MM) TEB XEB FLF FE D2 B7Z XB7 XB8
 EB3BASE6-G	White	Suspended Junction Box XT2 PTZD NEW

Network Accessories

Mounting Accessories

PoE Switches

Speakers

Power Supplies

Non-Managed Poe Switch

Ports

PoE

Uplink

Power Out

Format

Power In

Bandwidth

Download



SWC5POE-GIGA

4

Yes

1X RJ45

96W

802.3AF/AT

120V

10/100/1000

[DATASHEET](#)



SWC10POE-GIGA

8

Yes

2 X RJ45

196W

802.3AF/AT

120V

10/100/1000

[DATASHEET](#)



SWC18POE-GIGA

16

Yes

2 X RJ45

250W

802.3AF/AT

120V

10/100/1000

[DATASHEET](#)



SWC28POE-GIGA

24

Yes

4 X RJ45

350W

802.3AF/AT

120V

10/100

[DATASHEET](#)



SWC32POE-GIGA

28

Yes

4 X FIBER
4 X RJ45

450W

802.3AF/AT

120V

10/100/1000

[DATASHEET](#)

Managed Poe Switch

Ports

PoE

Uplink

Power Out

Format

Power In

Bandwidth

Download



SWC9POE-MAN

8

Yes

1

65W

802.3AH/AZ

48V / 1.5A

10/100/1000

[DATASHEET](#)



SWC18POE-MAN

16

Yes

2

230W

802.3AB/AF/AT

52V / 4.8A

10/100/1000

[DATASHEET](#)

Network Accessories

Mounting Accessories

PoE Switches

Speakers

Power Supplies

SPK-IP30W-POE ONVIF®



- 🔌 MICROPHONE
- 🔌 SUPPORTS POE .AT
- 🔌 SIP & ONVIF COMPLIANT
- 🔌 STARTUP IN LESS THAN 1S
- 🔌 SUPPORTS MP3, WMA AND WAV
- 🔌 COMPATIBLE WITH 3RD PARTY VMS
- 🔌 UP TO 12 PRE-RECORDED MESSAGES

SPK-30W-12V



- 🔌 POWERED BY 12V
- 🔌 STARTUP IN LESS THAN 1S
- 🔌 BUILT-IN CLASS-D AMPLIFIER
- 🔌 TALK THROUGH MOBILE OR VMS
- 🔌 WORKS WITH IP CAMERAS WITH RCA INPUT

MIC-AIO-12V



- 🔌 MIC SPEAKER
- 🔌 STROBE DETERRENCE
- 🔌 NO EXTRA WIRES NEEDED
- 🔌 WORKS WITH IP CAMERAS
- 🔌 TALK THROUGH MOBILE OR VMS

Watts	30W PoE+	30W 12V	2.5W 12V
Siren	120dB	105dB	88dB
Hertz	8KHz 350Hz	8KHz 350Hz	-
Dispersion	230°	230°	-
Distance	Mic 10M	-	Mic 10M
IP Rating	IP66	IP67	IP66
Temperature	-30~+60°C	-30~+60°C	-30~+55°C
Download	DATASHEET	DATASHEET	DATASHEET

Network Accessories

Mounting Accessories


PoE Switches

Speakers

Power Supplies



PWR-12V-2A
POWER SUPPLY



ESATA-4HDD
4HDD EXTERNAL HARD DRIVE CASING



PWR-12V-3A
POWER SUPPLY



SPLIT-4
PIGTAIL POWER SPLITTER 1-4



PWR-12V-5A
POWER SUPPLY



MIC-CAM-KIT
12V MICROPHONE / RCA



PWR-48V-3.5A-4PIN
POWER SUPPLY



22 INCH MONITOR
LED 1080P HDMI



T-BLOCKS
POWER CONNECTOR




DETBEX
Boîte de Dissuasion

Public View Monitors

PVM Accessories

MONPVM-10



- 3W BUILT-IN SPEAKER
- LED DETERRENCE LIGHTS
- WIFI & RJ45 CONNECTION
- PRE-RECORDED MESSAGES
- FACE DETECTION AND PIR SENSOR

MONPVM-22



- 2X 3W BUILT-IN SPEAKER
- LED DETERRENCE LIGHTS
- WIFI & RJ45 CONNECTION
- PRE-RECORDED MESSAGES
- FACE DETECTION AND PIR SENSOR

MONPVM-32

Special Order



- 2X 3W BUILT-IN SPEAKER
- LED DETERRENCE LIGHTS
- WIFI & RJ45 CONNECTION
- PRE-RECORDED MESSAGES
- FACE DETECTION AND PIR SENSOR

Camera Resolution	2MP	2MP	2MP
Lens	3.3MM	3.3MM	3.3MM
Display Resolution	1280 X 800	1920 X 1080	1920 X 1080
Screen Size	10.1"	21.5"	32"
Power	DC 12V or PoE	DC 12V or PoE	DC 12V
IK Rating	IK7	IK7	IK7
Temperature	0~+50°C	0~+50°C	0~+50°C
Compliance			
Download	DATASHEET	DATASHEET	DATASHEET

PVM ACCESSORIES

WALL MOUNT PVM 10"
WMB-PVM10



POLE MOUNT PVM 10"
PMB-PVM10

Special Order



ACCESSORY COMPATIBILITY



	FLF	D2	D6	XD6	TEB XEB	T2	XT2	T3 XT3	B2	B7 XB7	XB8	XB7F	PTZD	PTZ XPTZ	FE	QUAD	CMB6-G	WMB6 (-B)	DBASEX-P	DBASEX-C
EB3BASE3 (-B)			✓	✓				✓												
EB3BASE3-G			✓	✓				✓									✓	✓		
EB3BASE4 (-B)					✓*	✓					✓									
EB3BASE4-G					✓*	✓					✓							✓	✓	
FEBASE														✓						
FEBASE-G														✓			✓	✓		
TEBBASE1 (-B)					✓							✓								
TEBBASE1-G (-B)					✓							✓						✓	✓	
D2BASE1 (-B)	✓	✓																		
D2BASE1-G (-B)	✓	✓																✓	✓	
WMB2 (-B)		✓			✓															
WMB5 (-B)			✓			✓	✓	✓					✓							
B6BASE1									✓	✓										
WMB8														✓		✓			+	+
DBASEX			✓	✓		✓		✓		✓									+	
DBASEC		✓			✓					✓										+
CMB6-P														✓		✓			+	
CMB6-EXT-120 (-B)	✓	✓			✓					✓	✓	✓			✓					
CMB6-EXT-150 (-B)			✓	✓		✓	✓						✓							
DCMB2		✓																		
DCMB6			✓																	
D6-CAP			✓	✓																
EB3BASE6							✓						✓							
EB3BASE6-G							✓						✓				✓	✓		
PTZBASE1																			✓	

* PLEASE NOTE THAT THE BOX IS BIGGER THAN THE CAMERA HOUSING

+ NOTE : THESE MOUNTS REQUIRE ADDITIONAL COMPONENTS FOR PROPER USE

CAMERA HOUSING

Bullet	
B7	
XB7	
XB8	
XB9	
Dome	
FLF	
D2	
D6	
XD6	
Eyeball	
TEB	
XEB	
Turret	
T2	
T3	
XT2	
XT3	
Fisheye	
FE	
Pan Tilt Zoom	
PTZ	
XPTZ	
Spéciality	
QUAD	
PIN	

CAMERA FEATURES

Z	Motorized Lens
VF	Varifocal Lens
F	Fixed Lens
B	Black Color
M	Microphone
AI	Artificial Intelligence
L	Limited
PIR	Infra Red Perimeter
FDA	Fixed Dome Microphone
FE	Fisheye Lens
360	360° View
28	2.8, 2.8-12, 5-50, : Lens Size In MM
IP	Internet Protocol
AIO	Analog Hd (All In One) - TVI-CVI-AHD-ANALOG
CVT	Covert Camera
PTZ	Pan Tilt Zoom
PIN	Pinhole
X	Deterrence, Speaker, Mic And Siren
PAN	Panoramic 180°
TV	Total View - See In Color At Night
E	Eco - Basic AI Features
WL	WiFi
S	Spectral - See in Full Color at Night

RESOLUTION

12MP
8MP
5MP
4MP
2MP

ALL OUR PRODUCTS ARE



COMPLIANT



GSDGROUPINC.com



1-866-791-7020



sales@gsdgroupinc.com



180 Boul Bellerose Ouest, Suite 100,
Laval QC H7L 6A2 Canada



PROUDLY CANADIAN

